

CSR

INTERNATIONAL VOLTAGE SALIDA LED EXIT

tradeSELECT®

FEATURES

- LED life-cycle of more than 10 years
- Molded-in template for Quick installation
- Meets International input voltage requirements
- Optional long-life 4.8V Nickel Cadmium battery for 90 minute emergency lighting
- Provided with test switch and AC-On indicator
- Canopy Included



RELATED PRODUCTS

- [CU2 - LED Emergency Light](#)
- [CU2SQ - LED Emergency Light](#)

SPECIFICATIONS

APPLICATION

- The CSR Series can be applied in stair-wells, hallways, offices and other commercial applications. Offers 120 or 220-240VAC input at 50/60HZ
- The Compass International Exit offers quality and value with a compact and attractive LED based emergency exit

CONSTRUCTION

- The white housing is made of high impact UL flame rated thermoplastic
- Snap together canopy, housing and removable chevrons for quick and easy installation

CERTIFICATIONS

- Manufactured to UL standards
- NFPA 101 and NFPA 70
- OSHA

INSTALLATION

- Universal single or double-face with SALIDA panel

WARRANTY

- 2 year full unit warranty
- See [HLI Standard Warranty](#) for additional information


ORDERING GUIDE

Catalog Number	Description
CSRIV	120/220-240VAC, 50/60Hz., Universal SALIDA Face, Red LED, AC only
CSREIV	120/220-240VAC, 50/60Hz., Univ. SALIDA Face, Red LED Emergency, NiCad battery

INPUT POWER REQUIREMENTS

	Input Watts (W)		Input Amps (A)	
	120VAC	230VAC	120VAC	230VAC
CSR	3.8	3.8	0.034	0.02

DIMENSIONS

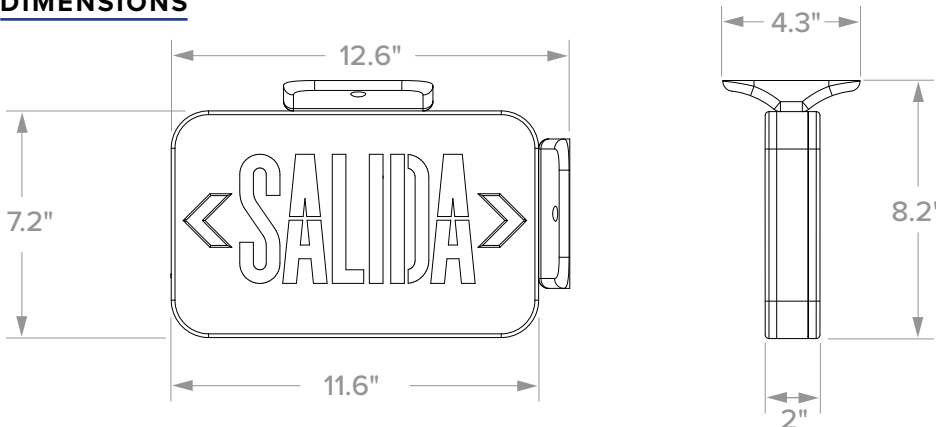

Single Carton Weight	2lbs.
Master Carton Quantity	6 each