

# CHLORIDE

by Signify

## Exit/Emergency


CU series

Steel unit, 27W  
Chicago Approved



Project: \_\_\_\_\_  
Location: \_\_\_\_\_  
Cat.No: \_\_\_\_\_  
Type: \_\_\_\_\_  
Lamps: \_\_\_\_\_ Qty: \_\_\_\_\_  
Notes: \_\_\_\_\_

### Example: CU6L27W

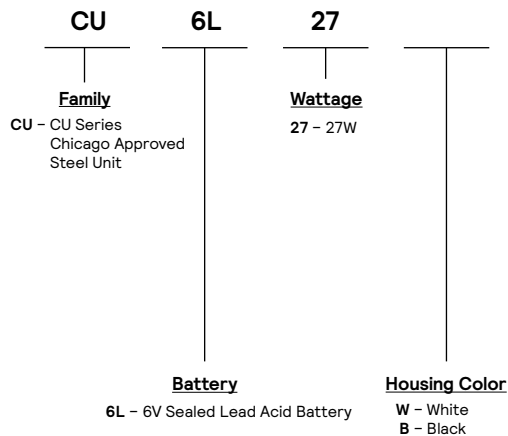

### codes and standards

- UL listed to standard 924
- NFPA 101 (Life Safety Code)
- NFPA 70 (National Electric Code)
- OSHA standards
- City of Chicago codes
- UL listed for damp locations 68°F (20°C) to 122°F (50°C)

### construction

- Housing is constructed of durable 20-gauge steel housing.
- Housing color is standard neutral white finish, black finish is optional.

### installation

- Unit is to be mounted to the wall.
- Two additional keyhole mounting holes are located at the top of the unit housing in addition to the J-Box mounting holes.
- These two additional mounting slot holes must be used when the unit is mounted to the wall.
- Additional chain support (supplied by others) may be required by local codes.

### electronics

- Charge rate/power "ON" LED indicator light and push to test switch for mandated code compliance testing.
- Low Voltage Battery Disconnect protects the battery from being severely damaged by deep discharge during prolonged power failures.
- Emergency units feature a fully automatic charger designed to recharge the battery within 24 hours.
- 120/277V dual input.
- Power Consumption: All models 120/277V maximum wattage is 11W and maximum amps are .11A/.04A.

### lamps

- Unit has two 6V, 12 Watt halogen lamp heads.

### battery

- Maintenance free sealed lead acid battery.
- Provides a minimum of 90 minutes emergency illumination while in the emergency mode.

### warranty

- Five year warranty. (Lamps not included.)



# CU Steel unit, Chicago Approved

27W

## dimensions

