# CXTEU



# INCANDESCENT EMERGENCY THERMOPLASTIC COMBO

STANDARD

















# ILLUMINATION

- Two fully adjustable 5.4W, glare-free lamp heads.
- Smooth thermoplastic reflector and plastic lens for optimal light distribution.
- Ultra bright, energy efficient, long life Red or Green LED EXIT sign illumination.

# **ELECTRICAL**

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- 6V maintenance-free, rechargeable sealed lead acid battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

### **MOUNTING**

- EZ-snap mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

# HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- EZ snap-out Chevron directional indicators.


# **OPTIONS**

- RC: Remote capacity of up to 11.0 watts.
- HTR: Optional internal heater for cold temperature (-9°C – 40°C) applications.
- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.
- USA: Substantial transformation assembly in the U.S. complies with "Assembled in the USA" under the Buy American Act.

# **WARRANTY / LISTING**

- Five year warranty on all electronics and housing. Battery prorated for two years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (20°C 40°C).
- Certified to CEC under Title 20 Regulations.
- Meets CSA C22.2 No. 141-02 requirements for unit equipment.

### **DIMENSIONS**

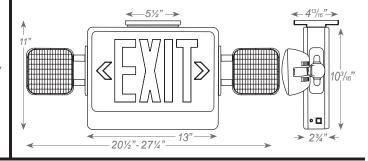

## **ORDERING INFORMATION**

Special voltage & SALIDA face plate options available. Check with your Best Lighting Representative.

Lighting Representative.									
1	Not available with RC units								

Sample Part Number: CXTEU2RW										
MODEL	MODEL No. of FACES		LETTER COLOR		HOUSING COLOR		OPTIONS			
CXTEU	2	Universal Single/	R	Red	W	White	RC	Remote Capacity		
	en 8	Double Face	190	Green O	tib	G <sub>lack</sub> OII	HTR	Internal Heater <sup>1</sup>		
V	V/V	w.emerge					SDT	Self-diagnostics		
							USA	Assembled in USA		