



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

## SPECIFICATIONS

### FEATURES

- Die-cast aluminum emergency light
- Mounts in minutes to any 3-1/2-4" octagonal or 4" square box

### CONSTRUCTION

- Rugged die-cast aluminum construction
- Telescoping, fully rotatable heads

### LAMP

- Utilizes two 1W or 3W MR-16 LED heads in emergency mode; higher wattage lamps are available upon request, consult factory for more options

### ELECTRONICS

- Dual-voltage input capability: 120/277V
- Low-voltage disconnect
- AC lockout
- Brownout protection
- AC indicator light with test switch

### BATTERY

- Lead-calcium battery is standard, Nickel-cadmium battery offered as an option
- Provides a minimum of 90 minutes of illumination in emergency mode
- Operating temperature range: 0 °C to 40 °C

### COMPLIANCE

- Tested and Listed to UL 924 for damp location
- Meets or exceeds NFPA, NEC, and OSHA illumination standard

### WARRANTY


- 5-year warranty on housing and electronics. Battery is prorated

## DCA-100-LED

DIE-CAST ALUMINUM EMERGENCY LIGHT



## DIMENSIONS

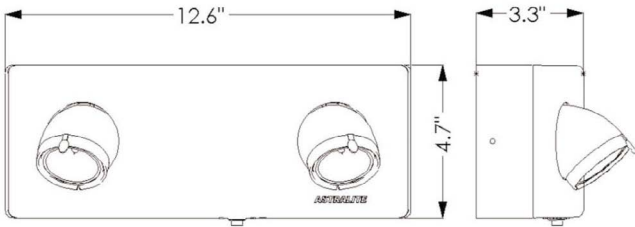

## ORDERING GUIDE

MODEL	LAMPS	HOUSING FINISH	OPTIONS
DCA-100-LED	2x1 (2) 1W LED 2x3 (2) 3W LED	BA Brushed Aluminum W White B Black	220 220 VAC Input NC Nickel-Cadmium Battery SD Self Diagnostics