

# UFO-3,4,5,6

# Lampak®

## Fluorescent Power Packs

BATTERY PACKS



### FEATURES

- Power pack for use with linear or long compact fluorescent lamps
- Compatible with electronic, magnetic, energy saving or dimming AC ballasts
- Sealed nickel-cadmium battery ; no AC ballast required for emergency only luminaires
- Can be used with switched or unswitched luminaires
- Installation may be inside, on top of, or remote from the luminaire
- Compatible with AC ballasts having End-of-Lamp-Life feature
- 120/277VAC 60Hz operation, test switch and AC-On indicator light
- 90 minute emergency operation (UFO-5W, 120 minute emergency operation)
- Temperature range: 0°C to 50°C (32°F to 122°F)
- UL 924 Damp Location Listed

### ORDERING INFORMATION

MODEL	SELF-DIAGNOSTICS
UFO-3AW	Blank
UFO-4W	None
UFO-5W	I Spectron
UFO-5AW	Self-test/ Self-diagnostic
UFO-6W	Electronics <sup>1</sup>


<sup>1</sup>UFO-6W only

### ACCESSORIES

MODEL	DESCRIPTION
F-WC	Wire bundle cover <sup>1</sup>
SPRTS	Remote test switch/charge indicator module <sup>2</sup>

<sup>1</sup>Encloses exposed wiring harness when power pack is externally mounted on the lighting fixture. One required per fixture.

<sup>2</sup>Fits single-gang box.

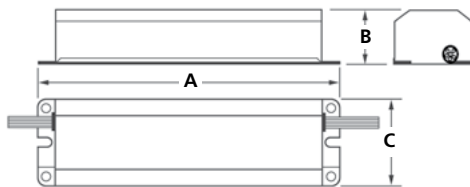

MODEL	A	B	C
UFO-3AW, 4W, 5W, 5AW	9 <sup>3</sup> / <sub>8</sub> " (23.8 cm)	1 <sup>1</sup> / <sub>2</sub> " (3.8 cm)	2 <sup>3</sup> / <sub>8</sub> " (6.0 cm)
UFO-6W, -6WI	13 <sup>3</sup> / <sub>8</sub> " (33.9 cm)	1 <sup>1</sup> / <sub>2</sub> " (3.8 cm)	2 <sup>3</sup> / <sub>8</sub> " (6.0 cm)

### SPECIFICATIONS

CATALOG NUMBER	INPUT WATTAGE	OUTPUT WATTAGE	LAMP TYPE	LAMP EXAMPLES	1 LAMP LUMENS	2 LAMP LUMENS		
UFO-3AW	3.5	9.6	T8 T10 T12		350-450	--		
UFO-4W	3.5	14.4	Long CFL 4-pin Circline 4-pin		500-600	--		
UFO-5W <sup>1</sup>	3.5	14.4	T8 T10 T12		600-700	--		
UFO-5AW	3.5	14.4	Long CFL 4-pin Circline 4-pin		600-700	600-700 <sup>2</sup>		
UFO-6W UFO-6WI	4.0	24.0	T8	F025, FB024 T8	1250	1100		
				F032, FB031 T8	1350	1350		
				F096 T8	1400	--		
				F017, FB016	1050	950		
			T9 T10					
				T12	F40T12, F40/U	1100	1100	
			F48T12/HO		1200	--		
			F96T12, HO, VHO		1100	--		
			F40T12/ES 34W		975	975		
			Long CFL 4-pin	F39/36BX, PL-L 36W, Dulux L39W	1100	1100		
				F27/24BX, PL-L 24W, Dulux L27W	--	1000		
				PL-L 40W, F40/30BX, F50BX	900	--		
PL-L 50W, Dulux L55W	900	--						
CFL 4-pin								
2D 4-pin	F28 2D/4P	1100	1100					
	F38 2D/4P	1000	1100					

<sup>1</sup>120 minute run time    <sup>2</sup>2-lamp operation for linear T8, T10 and T12 only