

# DXR

## INCANDESCENT REMOTE CAPABLE THERMOPLASTIC EMERGENCY UNIT



STANDARD

OPTIONAL



### ILLUMINATION

- Adjustable, glare-free PAR-Type lamp heads with 7.2 watt (on 6V models) and 9/12 watt (on 12V models) incandescent lamp heads.

### ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- 6V maintenance-free, rechargeable sealed lead acid battery.
- Remote capacity of 35.6W (6V 50W model)/32W (12V 50W model)/85.6W (6V 100W model)/76W (12V 100W model) standard.
- Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

### MOUNTING

- Universal knockout pattern on back for wall mount.
- Knockouts for conduit feed applications.

### HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact thermoplastic construction.


### OPTIONS

- HTR: Optional internal heater for cold temperature (-9°C – 40°C) applications.
- 20SB: 12V 20.0 watt sealed beam halogen lamps for increased center-to-center spacing.
- USA: Substantial transformation assembly in the U.S. complies with "Assembled in the USA" under the Buy American Act.

### WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for two years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for dry locations (25°C).

### DIMENSIONS

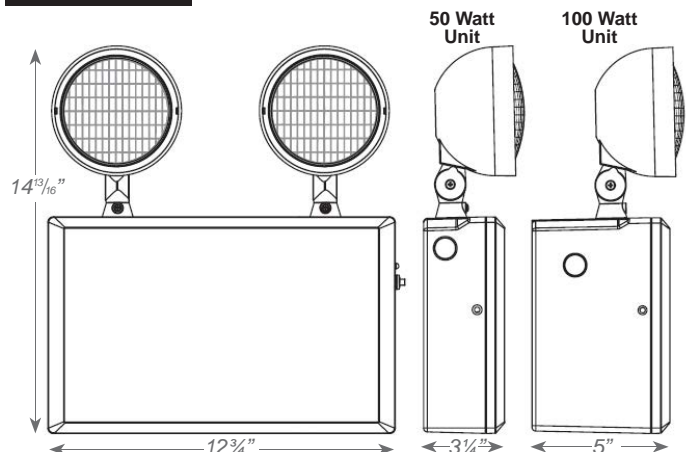

Sample Part Number: DXR-1210

### ORDERING INFORMATION

Special voltage options available. Check with your Best Lighting Representative.

MODEL	VOLTAGE	CAPACITY	OPTIONS
DXR	6 6 Volts	5 50 Watt	HTR Internal Heater <sup>1</sup>
	12 12 Volts	10 100 Watt	20SB 12V20W Sealed Beam Halogen <sup>2</sup>
			USA Assembled in USA

<sup>1</sup> Available with 50W units only.

<sup>2</sup> Available with 12V units only.

www.emergency-lighting.com

UNIT EQUIPMENT

DXR