



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

SPECIFICATIONS

FEATURES

- Extruded aluminum exit sign designed for use in New York City
- Designed for wall, ceiling, and end mounting
- Pendant mounting kit is available (sold separately, see spec sheet for pendant kit)

CONSTRUCTION

- Specification-grade rugged extruded aluminum construction
- Features a polyester powder coat finish
- Knockout directional indicators
- The face design features 8" letters with 1" stroke; 100ft viewing distance

LAMP

- AllnGaP LEDs with a rated life of 10+ years

ELECTRONICS

- Dual-voltage input capability: 120/277V
- Low-voltage disconnect
- AC indicator light with test switch
- Brownout protection

BATTERY

- EM option comes standard with nickel-cadmium battery
- Provides a minimum of 90 minutes of illumination in emergency mode

COMPLIANCE

- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards

WARRANTY



- 5-year warranty on housing and electronics. Battery is prorated

EANY

EXTRUDED ALUMINUM LED EXIT SIGN



DIMENSIONS

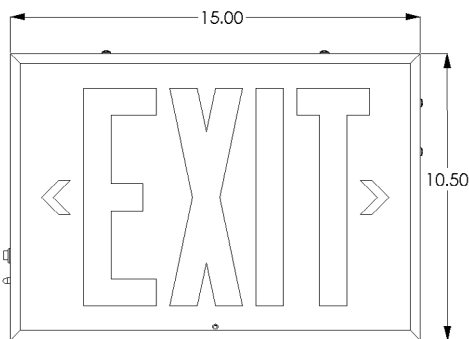

Material	Mounting	Battery	Code Compliance	Dimensions
Steel	Wall / Ceiling / End	Nickel-cadmium	UL 924	15" W X 10.5" H X 2.25" D

ORDERING GUIDE

MODEL	MOUNTING	LETTER COLOR	HOUSING COLOR	POWER CONFIGURATION	OPTIONS
EANY	U ¹ Universal Mounting	R Red G Green	W White B Black	AC AC Only EM Emergency Battery	DI Two Transformer Input FL ² Flasher Only FA ³ Fire Alarm Panel Interface FLA ⁴ FL w/ Audible Alarm FAA ⁵ FA w/ Audible Alarm SW Special Wording

Notes:

1. Includes canopy, 2 stencils, 2 diffusers, and one back.
2. Battery units only. Flashes when unit goes into emergency mode
3. AC and Battery Units. Flashes in both modes when signal from fire alarm panel is received (6 to 24 VDC)
4. Battery Units Only
5. AC and Battery Units.