



## ELL

12-60 Watt Emergency Light

DATE:

PROJECT

COMMENTS:



### FEATURES

- Two fully adjustable, top mounted Par 36 style lighting heads in high impact thermoplastic are supplied as standard. Additional lamp types and wattages available for lighting heads
- Capable of powering multiple remote heads
- Unique locking twist-collar securely holds the lens for quick and easy re-lamping
- Low voltage cut-off prevents battery damage and ensures positive charge acceptance following an extended discharge
- UL listed 90 minute run-time
- Self-Test / Self-Diagnostic monitoring available
- Maintenance free, sealed Lead Calcium battery or Nickel Cadmium battery
- Short circuit battery protection
- Brownout detection ensures emergency operation during periods of low line voltage
- Line-latch prevents unnecessary discharge of battery during installation. Loads will not illuminate until after application of utility power
- Key hole mounting slots and conduit knockouts are provided for additional mounting options
- 120/277 VAC field-selectable inputs
- BAA Compliant



### ORDERING INFORMATION *ELL-LC-6V18W-BK-MB-1-XRH-ME-L125*

1. SERIES	2. BATTERY TYPE	3. OPERATION	4. FRAME COLOR	5. MOUNTING	6. HEAD COUNT
ELL	-	-	-	MB	-
LC Lead Calcium Battery Backup		6V18W 6 Volts, 18 Watts 6V27W 6 Volts, 27 Watts 6V36W 6 Volts, 36 Watts 6V60W 6 Volts, 60 Watts	12V27W 12 Volts, 27 Watts 12V36W 12 Volts, 36 Watts 12V60W 12 Volts, 60 Watts	BK Black Frame WH White Frame	MB Back Mount 0 No Heads 1 One Head 2 Two Heads
NC Ni-Cad Battery Backup		6V22W 6 Volts, 22 Watts 6V42W 6 Volts, 42 Watts 6V54W 6 Volts, 54 Watts	6V90W 6 Volts, 90 Watts 12V42W 12 Volts, 42 Watts 12V90W 12 Volt, 90 Watt		
7. HEAD STYLE	8. HEAD LOCATION	9. LAMPS <sup>1</sup>	10. OPTIONS		
XRH	-	-	-		
XRH XRH Lamp Heads	ME End Mount / Side Mount MF Front Mount MT Top Mount	L65 LED 6V 5W L67 LED 6V 7W L125 LED 12V 5W L127 LED 12V 7W	BLANK = NO OPTION SD Self-Diagnostics SR1 Self-Diagnostics + IR Remote Testing Receiver (120 VAC) SR2 Self-Diagnostics + IR Remote Testing Receiver (277 VAC) AA Audible Alarm (Buzzer) AM Ammeter	CS CordSet FA Fire Alarm Interface TD Time Delay - 120/277 VAC VM Voltmeter TP Tamperproof Screws	

### ORDERING NOTES

1. Additional lamp options may be available, please contact [Quotes@Isolite.com](mailto:Quotes@Isolite.com) if non-LED lamps are required.

### ACCESSORIES; ORDER SEPARATELY

- WG 1 = Wire guard 17.0" X 17.0" X 17.0"

## CONSTRUCTION

- 20 gauge steel cabinet
- Durable white powder-coat finish

## TEMPERATURE RATING

- From 50°F to 113°F


## APPROVALS

- CSA-US listed
- Meets or exceeds UL924 standards
- NFPA 101 Life Safety Code
- NFPA 70-NEC
- OSHA
- BAA Compliant

## WARRANTY

- Isolite offers a 3-year limited warranty. For further details, refer to General Warranty and Obligations in the Isolite manual or on our website. Lamps not warranted

## DIMENSIONS

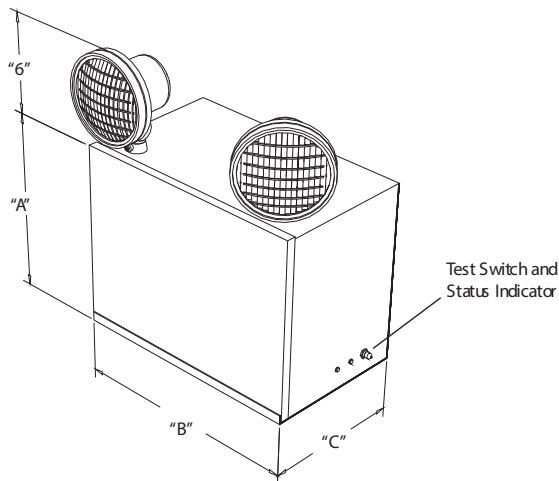

DIMENSION CHART			
UNIT SIZE	A	B	C
12W-42W	6.125"	11.125"	3.5"
54W-60W	9.5"	15"	4.25"