

## ELX Remote Capable Exit Series

Economical, thermoplastic LED exit sign



### Construction

- UV stabilized thermoplastic body
- 6 inch exit lettering legend, available in red or green
- Field selectable chevrons
- Standard universal faces

### Mounting


- Surface mount
- Canopy included for end or ceiling mount applications
- Universal J-box mounting

### Finishes

- White

### Dimensions

Dimensions are approximate and subject to change.

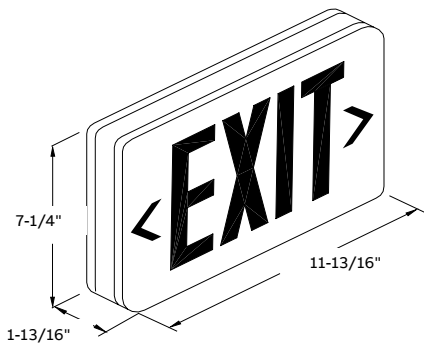

### Electronics

- Optional Advanced Diagnostics
- 120/277 60Hz
- Sealed maintenance free Nickel-Cadmium battery for self-powered models

### Approvals

- UL 924 listed
- Damp location 50°F to 104°F (10°C to 40°F)
- UL 94, 5VA flame rated

### Warranty (subject to proper installation and maintenance)

- Unit has a three-year warranty
- Detailed warranty terms located on page 202 or online at: [www.emergi-lite.com/usa/files/EL\\_Warranty.pdf](http://www.emergi-lite.com/usa/files/EL_Warranty.pdf)

### Power consumption

Description
120/277VAC, 60Hz maximum 2.5W

### Accessories (order as a separate item)

Description	Suffix
Wire guard (wall mount)	WG1-E
Wire guard (ceiling mount and end mount)	WG5-E
Battery	820.0106-E
Pendant white	P*WT
Pendant black	P*BK

### How to order

Series	Legend color	Options
ELX400= AC only	RN= Red	Blank= No options
ELXN400= Self powered	GN= Green	-AD= Advanced Diagnostics
		-RAD= Advanced Diagnostics with 3.6V-3.6W remote capacity <sup>1</sup>

Example: ELXN400RN-RAD

<sup>1</sup>Available with red legend only, compatible with EF47DSQL or EF12D-LED


## EF47DSQL Series

Thermoplastic square LED  
Indoor remote heads



### Photometric performance

Lamp	Spacing center-to-center (feet)	
	7' mounting height	15' mounting height
EF47	13'	4'

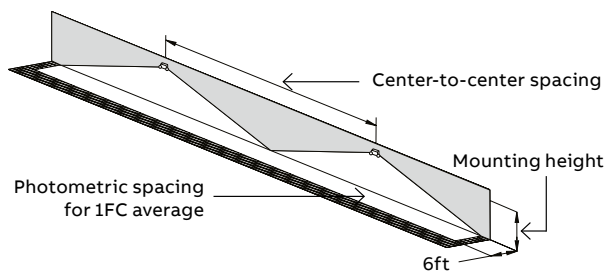

### Features


- Thermoplastic dual head remote
- LED 3.6V, 2W total
- 6000K LED color
- Wall or ceiling mount
- Damp location 50°F to 104°F (10°C to 40°F)
- UL 924 listed

### Warranty (subject to proper installation and maintenance)

- Unit has a three-year warranty
- Detailed warranty terms located on page 202 or online at: [www.emergi-lite.com/usa/files/EL\\_Warranty.pdf](http://www.emergi-lite.com/usa/files/EL_Warranty.pdf)

### Dimensions

Dimensions are approximate and subject to change.

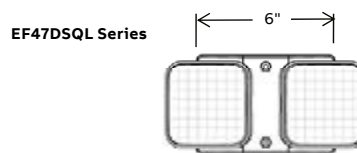

### How to order – EF47DSQL Series

Series	No. of lamp	Options
EF47	D= Double head	SQL= Thermoplastic square LED head

Example: EF47DSQL


## EF12D-LED Series

Thermoplastic square LED  
Outdoor remote heads



### Photometric performance

Lamp	Spacing center-to-center (feet)	
	7' mounting height	15' mounting height
EF12	13'	4'

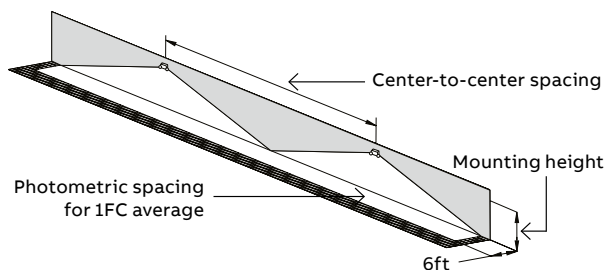

### Features

- Multi-volt 3.6, 6 or 12V, 3W in total
- Thermoplastic housing and aluminum canopy with fully adjustable LED heads
- Available only in gray 2-heads configuration
- Suitable for outdoor, wet location applications
- Wall or ceiling mount
- -4°F to 122°F
- UL 924 Listed

### Warranty (subject to proper installation and maintenance)

- Unit has a three-year warranty
- Detailed warranty terms located on page 202 or online at: [www.emergi-lite.com/usa/files/EL\\_Warranty.pdf](http://www.emergi-lite.com/usa/files/EL_Warranty.pdf)

### Dimensions

Dimensions are approximate and subject to change.



### How to order – EF12D-LED Series

Series	# of lamp	Options
EF12	Blank= Single head D= Double head	-LED= Thermoplastic square LED head

Example: EF12D-LED