

## ELX400 SQL LED Series

Combination unit with tool-less field-adjustable heads to accommodate top mount requirements



### Construction

- UV stabilized thermoplastic body
- Fully adjustable Square LED glare-free heads
- 6 inch EXIT lettering legend, available in red or green
- Field selectable chevrons

### Mounting

- Surface mount
- Canopy included for ceiling mount applications / end mount
- Universal J-box mounting

### Finishes

- White

### Remote capacity/combination units

- ELXN400-2SQLR and ELXN400-2SQLRAD feature a 3.6V Ni-Cd battery with two 1W LED heads attached as well as 3W of remote capacity for EF12D-LED or EF47DSQL

### Lamp head source

- 3.6V-1W LED head
- Lamp heads are fully adjustable to top or side with no tools required.
- 100 lumens per head

### Electronics

- Optional Advanced Diagnostics
- 120/277 60Hz

### Approvals


- UL 924 listed
- Damp location 50°F to 104°F (10°C to 40°F)
- UL 94, 5VA flame rated

### Warranty (subject to proper installation and maintenance)

- Unit has a three-year warranty
- Detailed warranty terms located on page 178 or online at: [www.emergi-lite.com/usa/files/EL\\_Warranty.pdf](http://www.emergi-lite.com/usa/files/EL_Warranty.pdf)


### Photometric performance

Spacing center-to-center (feet)	
7 ft. mounting height	15 ft. mounting height
13'	4'

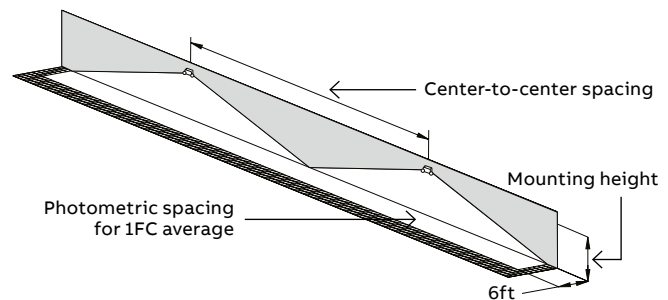

**Dimensions**

Dimensions are approximate and subject to change.

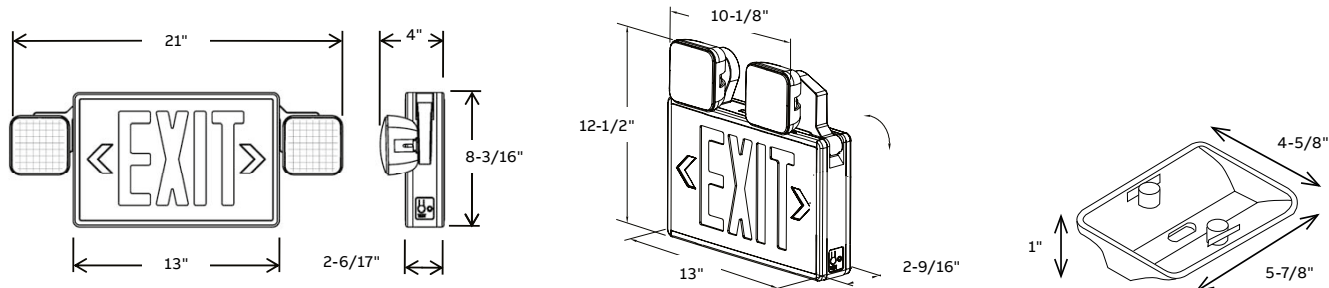

**Power consumption**

Description
120/277VAC, 60Hz, 0.048A

**Accessories** (order as a separate item)

Description	Suffix
Wire guard (heads in any position)	WG10-E
Replacement battery for ELXN400-2SQL	022434-E
Replacement battery ELXN400-2SQLR	022435-E
Replacement battery ELXN400-2SQLRAD	022435-E

**How to order**

Series	Legend	Heads	Options
ELXN400	R= Red G= Green	-2SQL= 1WLED	<b>Blank</b> = No option <b>R</b> = Remote capacity to power one double head remote <sup>1</sup> <b>R-AD</b> = Remote capacity to power one double head dedicated remote with Advanced-Diagnostics <sup>1</sup>

Example: ELXN400R-2SQLR-AD

<sup>1</sup>To be used with EF47DSQL or EF12D-LED only