



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

SPECIFICATIONS

FEATURES

- Contractor's choice thermoplastic emergency light with prismatic lenses
- Part of Astralite's quick ship program

CONSTRUCTION

- UV-stable, impact-resistant thermoplastic housing; meets UL94V-0 flame rating
- Two-step fast-and-easy installation

LAMP

- Utilizes two high-efficiency 1W LED heads in emergency mode
- Prismatic lenses eliminate glare and striation while providing even light distribution along areas of egress

ELECTRONICS

- Dual-voltage input capability: 120/277V
- Low-voltage disconnect
- AC indicator light with test switch
- Brownout protection

BATTERY

- Nickel-cadmium battery is standard and provides a minimum of 90 minutes of illumination in emergency mode
- Operating temperature range: 10° C - 40° C

COMPLIANCE

- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards

WARRANTY


- 5-year warranty on housing and electronics. Battery is prorated

EU-3-LED

THERMOPLASTIC L.E.D. EMERGENCY LIGHT



DIMENSIONS

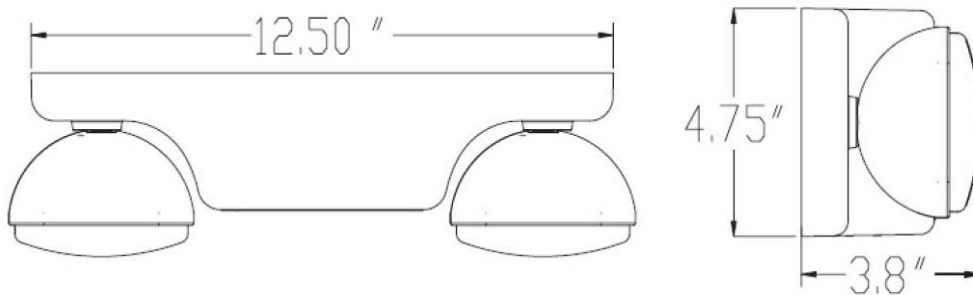

Material	Mounting	Battery	Code Compliance	Dimensions
Thermoplastic	Wall/Ceiling	Nickel-cadmium	UL 924	12.5" W X 4.75" H X 3.8" D

ORDERING GUIDE

MODEL	HOUSING FINISH	OPTIONS
EU-3-LED Thermoplastic L.E.D. Emergency Light	B Black W White	220 220 VAC Input LC Line Cord (3ft) SD Self Diagnostics