



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

SPECIFICATIONS

FEATURES

- Thermoplastic emergency light with snap-together concept for fast installation
- Remote capability and polycarbonate shield offered as options
- Part of Astralite's quick ship program

CONSTRUCTION

- UV-stable, impact-resistant thermoplastic housing; meets UL94V-0 flame rating

LAMP

- Utilizes two high-efficiency 1W LED heads in emergency mode

ELECTRONICS

- Dual-voltage input capability: 120/277V
- Low-voltage disconnect
- AC indicator LED light with test switch
- Brownout protection

BATTERY

- Nickel-cadmium battery is standard and provides a minimum of 90 minutes of illumination in emergency mode
- Operating temperature range: 10° C - 40° C

COMPLIANCE

- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards

WARRANTY


- 5-year warranty on housing and electronics. Battery is prorated

EU-4-LED

LED EMERGENCY LIGHT



DIMENSIONS

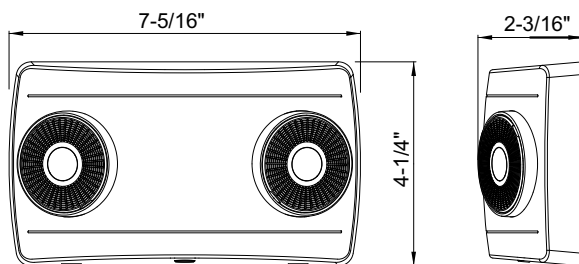

Material	Mounting	Battery	Code Compliance	Dimensions
Thermoplastic	Ceiling / Wall	Nickel-cadmium	UL 924	7.3" W X 4.25" H

ORDERING GUIDE

MODEL	HOUSING FINISH	OPTIONS
EU-4-LED Thermoplastic L.E.D. Emergency Light	B Black W White	REM 2W 3.6V Remote Capability PC1 Polycarbonate Shield