



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

## SPECIFICATIONS

### FEATURES

- Emergency light with enclosure, designed for indoor/outdoor use to provide a degree of protection against access to hazardous parts, ingress of solid foreign objects, water (rain, sleet, snow), and ice formation.

### CONSTRUCTION

- UV-stable, impact-resistant thermoplastic housing; meets UL94V-0 flame rating
- Polycarbonate shield provides a degree of protection against falling rain and sleet

### LAMP

- Utilizes two 5W or 8W MR-16 halogen lamps in emergency mode

### ELECTRONICS

- Dual-voltage input capability: 120/277V
- Low-voltage disconnect
- AC lockout
- Brownout protection
- AC indicator light with test switch

### BATTERY

- Lead-acid battery is standard, and provides a minimum of 90 minutes of illumination in emergency mode
- Nickel-cadmium battery offered as an option
- Operating temperature range: 10-40° C

### COMPLIANCE

- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards
- Wet location listed

### WARRANTY


- 5-year warranty on housing and electronics. Battery is prorated

## EU-MR-3R

NEMA 3R EMERGENCY LIGHT



## DIMENSIONS

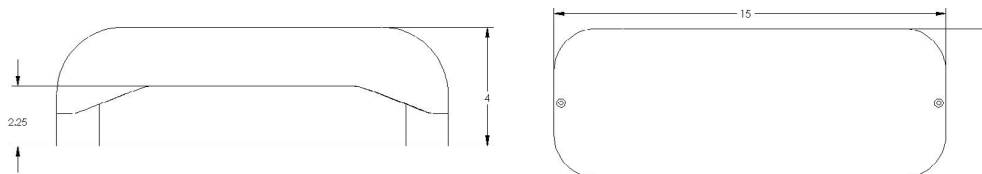

## ORDERING GUIDE

MODEL	HOUSING FINISH	OPTIONS
EU-MR-3R	G Gray	220 220 VAC Input