

exit LIGHTING



Optional self-diagnostic/self-test feature offers the ultimate in worry-free maintenance and reliability.



SALIDA faceplates also available.



FEATURES

Emergency operation of 90+ minutes on Battery Backup (EM) models

Completely self-contained

Fully automatic operation

Compact, low-profile design in neutral finish

Push-to-test switch

Automatic, low-voltage disconnect (LVD)

120 or 277 VAC operation

Injection-molded, V-0 flame retardant, high-impact thermoplastic housing

Charge rate/power on LED indicator light

Energy consumption of 3.2 watts for red letters and 3.8 watts for green letters


LED lamp life of 25 years plus

Universal mounting canopy for side or top installation

Standard AC and emergency units available

Ni-Cad battery on emergency (EM) units

DIMENSIONS

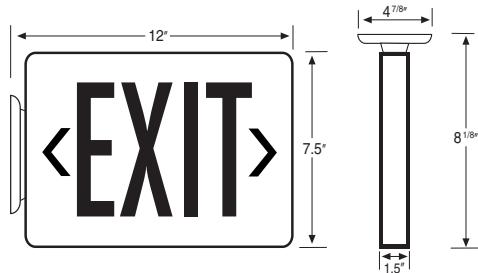

EM-800RED or EM-800R