



# FHEC30




## Thermoplastic Micro LED Exit Sign/Emergency Light Combo

- Push-to-test Switch
- LED Charge Indicator
- Universal single face and double face (extra faceplate included)
- Fully adjustable glare free lighting heads
- Ni-Cd battery
- Field replaceable snap out/in chevron directional indicator
- Universal mounting pattern knockout in
- Snap-fit faceplate installs without use of tools
- Dual voltage 120V/277V
- UL 924 listed for damp location

### General Specifications

	Red	Green
Input Voltage	120/277VAC	
Input Current (120V)	44mA	30mA
Input Current (277V)	175mA	13mA
Input Power (120V)	5W	3.22W
Input Power (277V)	4.8W	3.18W
Operating Frequency	60Hz	
Operating Ambient Temperature Range (Ta)	20°C to 30°C / 68°F to 86°F	
Overall Size	17.9" L x 8.2" H	
Emergency Operation	90 minutes	
Compliance	UL 924 Listed Damp Location	
Warranty	5 years from the date of manufacture	

### Mechanical Data

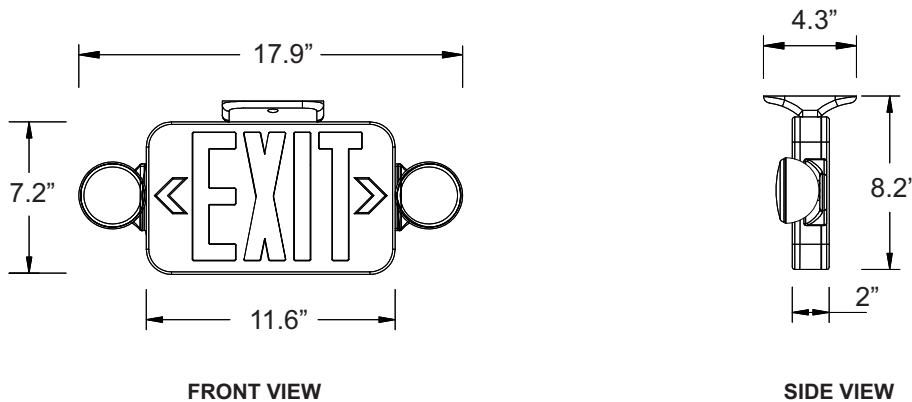

### Part Number Matrix

**FHEC30**

**W**

Case Color  
W = White  
B = Black

**R**

Letter Color  
R = Red  
G = Green

**H**

Options  
H = High Lumen