

FHEX25






Wet-Location LED Exit Sign

 Push-to-test switch LED charge indicator Sealed and gasketed housing Field selectable chevron directional indicator punch-outs Ni-Cd premium battery 	 Integral breather vent Resistant to corrosive atmospheres, non-hazardous dust environments, frequent hose-downs, water spray or splashing water Dual voltage 120V/277V UL Listed in accordance with UL924
General Specifications	
Input Voltage	120/277VAC
Input Current (120V)	28mA
Input Current (277V)	11mA
Input Power (120V)	3.2W
Input Power (277V)	3.0W
Operating Frequency	60Hz
Operating Ambient Temperature Range (Ta)	10°C to 40°C / 50°F to 104°F
Overall Size	11.75" L x 11.875" H
Emergency Operation	90 minutes
Compliance	UL 924 Listed
	Wet Location
Warranty	5 years from the date of manufacture

Mechanical Data

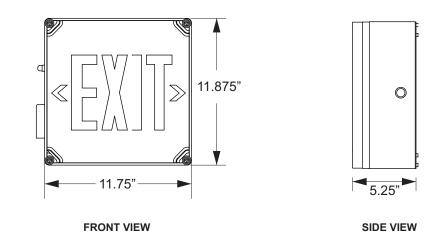

Part Number Matrix

FHEX25 R EN

 $\frac{\text{etter Color}}{\mathbf{R} = \text{Red}} \qquad \mathbf{E}\mathbf{N}$

Operation EM = Battery Backup

Fulham Co. Inc.: 12705 South Van Ness Ave., Hawthorne, CA 90250 Tel.: 1-323-779-2980 Fax.: 1-323-754-9060. order@fulham.com www.fulham.com Specifications subject to change without notice.