



FHEX26




Mini Wet Location LED Exit Sign

- Maintenance-free, NiCd battery
- Energy Saving LED
- Double face
- Universal knock-out chevrons
- Corrosion and impact resistant thermoplastic housing
- Optional Remote Capable version offers up to an additional 3W for 90 minutes
- Compatible with FHEM12RH (See Specification Sheet for details)
- Sealed and gasketed housing
- Ideal for: stores, offices, hospitals and school corridors


General Specifications

	FHEX26G	FHEX26R	FHEX26RRC	FHEX26GRC
Input Voltage	120/277VAC			
Input Current (120V)	28.1mA	20.7mA	36mA	36.4mA
Input Current (277V)	12.31mA	8.9mA	16.4mA	15.95mA
Input Power (120V)	3.06W	1.89W	4.15W	4.13W
Input Power (277V)	3.08W	1.86W	4.36W	4.19W
Operating Frequency	60Hz			
Operating Ambient Temperature Range (Ta)	0°C to 40°C / 32°F to 104°F			
Overall Size	12.625" L x 8.125" H x 2.5" W			
Emergency Operation	90 minutes			
Compliance	UL 924 Listed Wet Location			
Warranty	5 years from the date of manufacture			

Mechanical Data

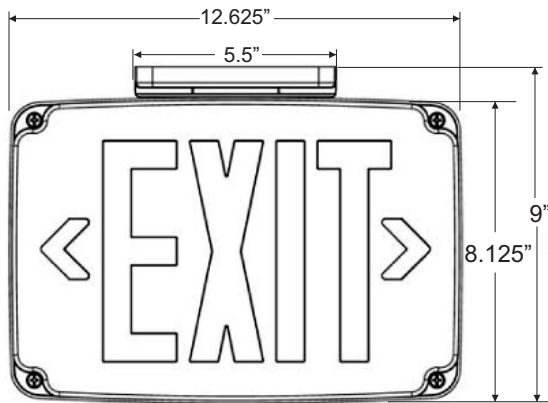

FRONT VIEW

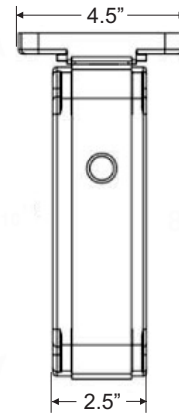

SIDE VIEW

Part Number Matrix

FHEX26

R

RC

Letter Color
R = Red
G = Green

Options
RC = Remote Capable