

## SPECIFICATION SHEET: FHSKITT03LNC





Type\_\_\_ **Project** Model # Remarks



## Specification:

INPUT VOLTAGE 120V - 277V ± 10%, 47-63Hz

SURGE PROTECTION C62.41 (TVS)

**OVER CURRENT PROTECTION FUSE** 

> INPUT CURRENT 0.07A

**INPUT POWER** <4W

LUMEN OUTPUT 450 LUMENS

MAXIMUM OUTPUT CURRENT 2.1 AMP WHEN USED WITH # FHSBATT3-C3

**24 HRS** 

**OUTPUT VOLTAGE** 3.6V

**OUTPUT SHORT CIRCUIT PROTECTION** SELF RESETTING PTC

RECHARGE TIME REQUIRED

**BATTERY TYPE** NiCd 3.6VDC

BATTERY CAPACITY AVAILABLE 3Ah


MINIMUM 90 MIN **ILLUMUNATION TIME** 


**ESTIMATED RUN TIME** 145 MIN

**OUTPUT CLASSIFICATION** UL 1310 / CLASS 2

AMBIENT TEMPERATURE 0°C - 50°C

WARRANTY 5 YEARS

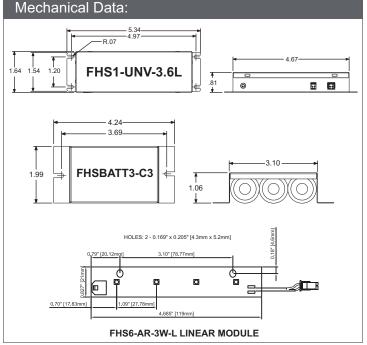

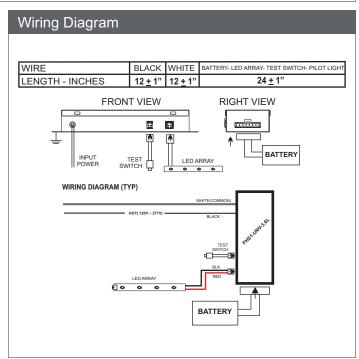

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 5 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog (www.fulham.com) Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described.