

DATE:	LOCATION:
TYPE:	PROJECT:
CATALOG #:	

HCX Series

SIDE-MOUNT DESIGNER COMBINATION LED UNIT

STANDARD FEATURES

- External push-to-test switch and AC-ON indicator
- Exit Sign Letters: 6" height, ¾" stroke
- Snap-in directional chevrons in Exit Sign
- Low voltage disconnect
- Transformer isolation
- AC lockout
- Temperature compensated charger circuitry
- MR16 Halogen lamp with rated 200 hour life
- Battery recharge time within UL specifications

OPTIONAL FEATURES

- LED MR16 lamps rated at 50,000 hour life expectancy.
- Available without integral lamp heads for added run time or remote capacity operation



RELATED PRODUCTS

[OCR - Matching Remote Head](#)



SPECIFICATIONS

APPLICATION

- The HCX Series provides bright, even LED Exit illumination in an attractive housing, designed for quick and easy installation
- Available with or without fully adjustable MR16 Halogen lamps and remote capacity option
- Remote capacity option; 12 watts (with integral lamp-heads), 23 watts (without lamps). Optional LED based MR-16 lamps available for increased coverage and additional remote capacity

CONSTRUCTION

- Precision-molded thermoplastic housing
- Lamp-heads are impact and scratch resistant, corrosion proof and UV stabilized material to resist discoloration
- Available in white or black with a light texture. Innovative snap-together design optimizes installation time
- Includes additional face-plate for single or double-face application
- Snap-in directional chevrons
- Includes canopy and universal mounting plate for end, ceiling or wall mounting
- Red or green polystyrene .030" diffuser is frequency matched to the LEDs providing optimum exit sign illumination

INSTALLATION

- Sign mounts to 3-½", 4" octagon, or square outlet boxes and standard plaster rings
- Back-plate provides a knock-out pattern for mounting to outlet box
- Mounting canopy provided with all models. Canopy mounts to outlet boxes by means of a mounting plate supplied
- Exit housing snaps to canopy
- Pre-stripped pigtail leads provided. Push-in wire connectors supplied for making AC connections
- All wiring dresses into formed wire-ways in housing

ILLUMINATION

- Four long-life LEDs provide exit illumination
- Exceeds the 2009 UL 924 requirements for brightness and uniformity
- Unit illumination by halogen or optional high-performance LED based MR16 lamps

COMPLIANCES

- UL 924 Listed
- NFPA 70
- NFPA 101
- CEC T20 Compliant

WARRANTY

- 5 year warranty
- See [HLI Standard Warranty](#) for additional information

HCX Series

SIDE-MOUNT DESIGNER COMBINATION LED UNIT

ORDERING GUIDE

Example: HCXURW-03L

CATALOG # _____

HCX	U								
Model	Faces	Letter Color	Finish	Options		Accessories			
HCX	Side Mount Designer Exit/ Emergency Light	U Universal Single/ Double Face	R Red G Green	W White Housing B Black Housing	Blank	5W Halogen Lamps	<input type="checkbox"/> B24	Set of two (2) 24" bar hangers for T-bar ceilings	
					03L	3W LED Lamps	<input type="checkbox"/> B6	Set of two bar hangers for ceiling joist up to 24" centers	
					RC12	12W Remote Capacity (Includes lighting heads) ¹²	<input type="checkbox"/> SCA8D	Sloped ceiling adapter (see note on page 7)	
					0-RC12	23W Remote Capacity (No lighting heads) (Available in White Only) ¹²			

- Notes:
 1 -RC12 option can be specified with the -03L option.
 2 No Lamp-head option only available with remote capacity model

ADDITIONAL PRODUCT INFORMATION

OPERATING TEMPERATURE RANGE:

Standard models: 20°C to 30°C (68°F to 86°F)

AC Input Voltage

120VAC or 277VAC: 60 Hz operation standard

POWER CONSUMPTION:

4.5 watts at 120 or 277 VAC (all models)

Output Voltage	Battery	Lamp	Unit Capacity	Runtime	Extended Runtime	Remote Watts	Number of Remotes: 5W HAL	Number of Remotes: 3W LED
----------------	---------	------	---------------	---------	------------------	--------------	---------------------------	---------------------------


Standard Models

HCXURW	6VDC	Lead-Calcium	5W HAL	10 watts	90 min.	No	--	--
HCXURWRC12	6VDC	Lead-Calcium	5W HAL	23 watts	90 min.	Yes	12	4
HCXURW-0-R C12	6VDC	Lead-Calcium	5W HAL	23 watts	90 min.	Yes	23	7

LED Models

HCXURW-03L	6VDC	Lead-Calcium	3W LED	10 watts	90 min.	Yes	--	--
HCXURW-RC12-03L	6VDC	Lead-Calcium	3W LED	23 watts	90 min.	Yes	17	5

DIMENSIONS

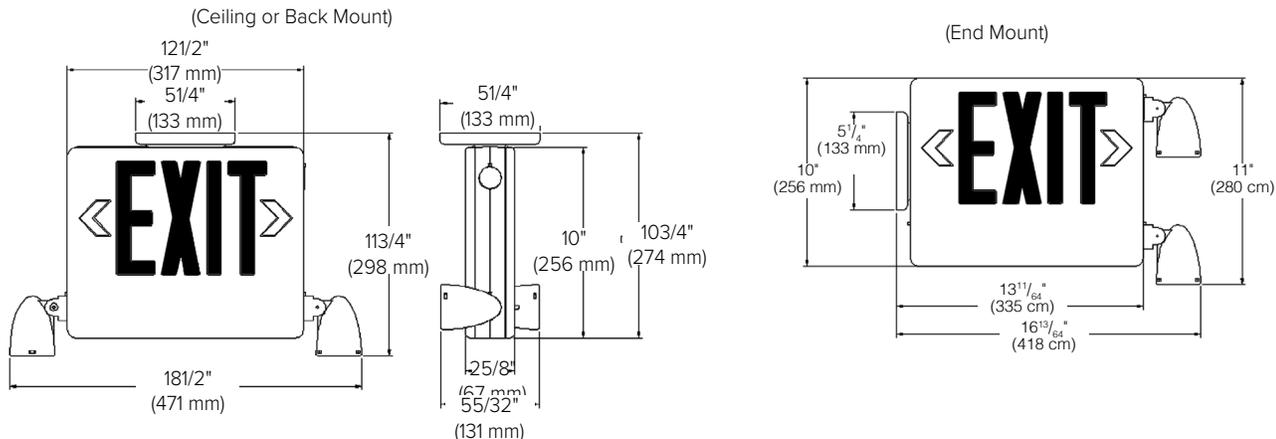


HCX Series

SIDE-MOUNT DESIGNER COMBINATION LED UNIT

APPLICATION DATA


Coverage for 5W HAL MR16 lamp

18'

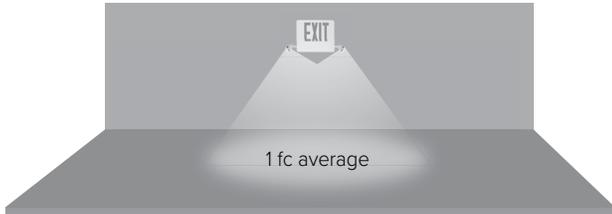

Coverage for optional 3W LED MR16 lamp

40'

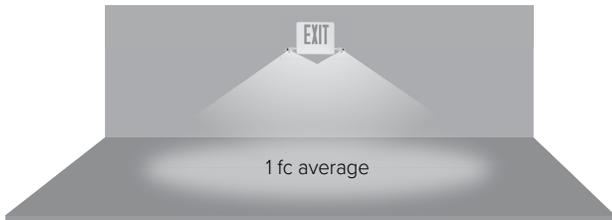

Meets Life Safety Code minimum illuminance of 0.1 fc and average illuminance of 1.0 fc. Assumes open space with no obstructions, mounting height of 7.5', ceiling height of 9' and reflectances of 80/50/20. Photometry files available on the Dual-Lite web site (www.dual-lite.com).