



Geo & Oval

Patient Room LED Night Light

Project:

Type:

Qty:

SPECIFICATIONS

Patient Room LED Night Light

HNL7

SPECIFICATIONS

Night lighting serves an important purpose in a medical facility. For ambulatory patients, sufficient light must be available to safely navigate from the bed to the restroom at night. Caregivers must see a clear path from hallway to bed and then have adequate light to observe the patient's condition, while minimizing disruption of the patient's sleep. Therefore, intensity and color of the light, as well as fixture placement, must be carefully considered. Both the Geo and Oval offer rugged die cast aluminum housings that meet the standards of the Americans with Disabilities Act (ADA), extending only 1.5" off the wall. Choose from standard warm white or optional amber LEDs.

Faceplate

Die cast aluminum faceplate.

Lens

High-impact, frosted polycarbonate lens.

Source

High output LED board.

Switching

Line voltage switching (by others).

Weight

Geo – approximate shipping weight 1 lbs
Oval – approximate shipping weight 1 lbs

Mounting

Installed to a single gang junction box.

Voltage

MVOLT, 120-277 Volt

Finish

Decorative faux finishes available to coordinate with any decor. Use CC finish option and supply finish chip for matching.

Input Watts

Geo 3 Watts
Oval 3 Watts

Color Quality

>80 CRI

Life Estimate

50,000 hours to 70% lumen maintenance.

Listing


UL Certified to meet US and Canadian standards. Suitable for damp locations.

Warranty


5-year limited warranty. Complete warranty terms located at:
www.acuitybrands.com/resources/terms-and-conditions

NOTE: Actual performance may differ as a result of end-user environment and application.
All values are design or typical values, measured under laboratory conditions at 25 °C.

HNL710 GEO

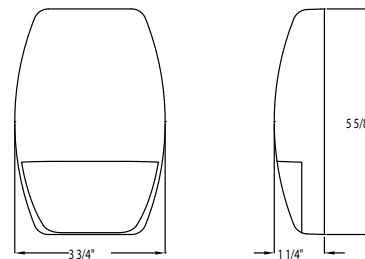

HNL720 OVAL

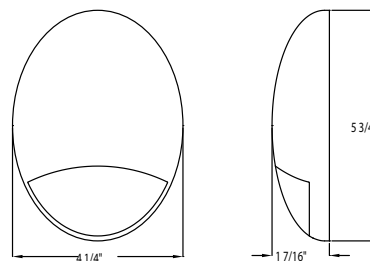

CATALOG NUMBER

Example: HNL710 MVOLT LED30 OS FW

| Series | Voltage | LED Color | Options | Finish |
|---------------------------|--------------------|--|--|--|
| HNL710 Geo HNL720 Oval | MVOLT 120-277 Volt | LED30 3000k Warm White LED40 4000k Neutral White LED50 5000k Cool White LEDAMB Amber 585-595nm LEDBL Blue 470nm LEDRD Red 625nm | PC Integrated Photocell OS Occupancy Sensor | FW Flat White AM Anit-Microbial White DPF1 Venetian Blue Marble DPF2 Foresta Green Marble DPF3 Burl Walnut DPF4 Knotty Pine |

Geo & Oval

Patient Room LED Night Light

Project:

Type:

Qty:

SPECIFICATIONS

Patient Room LED Night Light

HNL7

MOUNTING INFORMATION

- Ensure power is off before wiring fixture.
- Mount Mounting plate to Single Gang Box with 2 flat head screws
- All wiring must be in accordance with all local, state, and federal electrical codes.
- Recommend that a trained and certified electrician install product.

