



# KTEB-132-1-TP-EMI

## T8 ELECTRONIC BALLAST



### DESCRIPTION

1 x F32T8 | 120V | NPF | 6" Case | FCC Class B

<b>STARTING METHOD:</b> Rapid
<b>LAMP CONNECTION:</b> N/A
<b>INPUT VOLTAGE:</b> 120VAC ±10%
<b>INPUT FREQUENCY:</b> 50/60 Hz
<b>BALLAST FACTOR (LIGHT OUTPUT):</b> Normal
<b>WARRANTY:</b> 3 Years




### PRODUCT FEATURES

- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 167°F, 75°C
- Meets FCC Part 18 (Class B) Consumer Limits
- UL, cUL 935 Listed
- Transient Protection Meets ANSI/IEEE C62.41 Cat. A
- Lamp End-of-Life Protected

### ELECTRICAL SPECIFICATIONS

Lamp Type	No. of Lamps	Volts	Input Watts	Input Current (Amps)	Power Factor	Crest Factor	Ballast Factor	Ballast Efficacy Factor	Max. THD %
F32T8	1	120	31	0.45	0.58	1.49	0.88	2.84	150
F25T8	1	120	24	0.36	0.56	1.47	0.92	3.83	150
F17T8	1	120	19	0.29	0.53	1.52	1.05	5.53	150
F15T8	1	120	16	0.27	0.52	1.62	1.05	6.56	150
F40T12	1	120	27	0.40	0.57	1.44	0.70	2.59	150
F34T12	1	120	24	0.34	0.57	1.44	0.80	3.33	150
F30T12	1	120	22	0.33	0.55	1.43	0.80	3.64	150
F20T12	1	120	18	0.28	0.53	1.61	1.02	5.67	150

### WIRING DIAGRAM

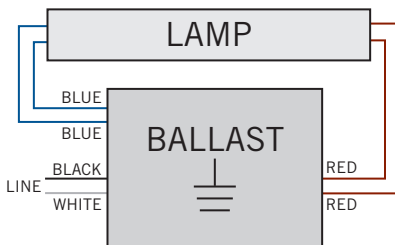




# KTEB-132-1-TP-EMI

## T8 ELECTRONIC BALLAST

### MECHANICAL SPECIFICATIONS

#### CASE DIMENSIONS

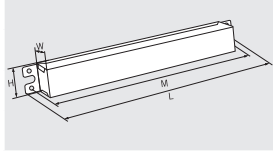

<b>LENGTH</b>	6.46"
<b>WIDTH</b>	1.37"
<b>HEIGHT</b>	1.00"
<b>MOUNTING</b>	6.00"

### CATALOG NUMBER BREAKDOWN

# KTEB-132-1-TP-EMI

