



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

SPECIFICATIONS

FEATURES

- Architectural-grade emergency light with self diagnostics option
- Style is the difference

CONSTRUCTION

- Elegant plated alloy construction
- Choose from five metal finishes: silver, gold, satin nickel, antique brass, or bronze; contact factory for custom finishes
- 2 adjustable heads rotate 360° to accommodate all aiming requirements

LAMP

- Uses two 8W 6V halogen or two 1W 6V LED MR-16 lamps in emergency mode; consult factory for additional lamp options

ELECTRONICS

- Dual-voltage input capability: 120/277V
- Self Diagnostics Board
- Low-voltage disconnect
- AC lockout installation
- Brownout protection
- AC indicator light with test switch

BATTERY

- Nickel-cadmium battery comes standard and provides a minimum of 90 minutes of illumination in emergency mode
- Operating temperature range: 0 °C to 40 °C

COMPLIANCE

- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards

WARRANTY


- 5-year warranty on housing and electronics. Battery is prorated

LB-100

SPECIAL PLATED EMERGENCY LIGHT



DIMENSIONS

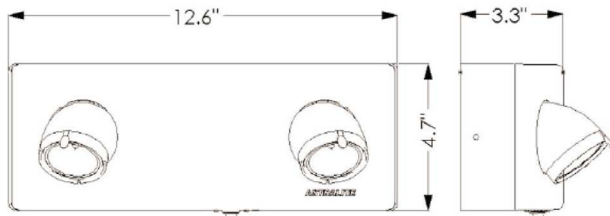

ORDERING GUIDE

MODEL	HOUSING FINISH	OPTIONS
LB-100	SL Silver GO Gold SN Satin Nickel AB Antique Brass BZ Bronze	220 220 VAC Input