

mule
SINCE 1923



MAKO

ARCHITECTURAL | EMERGENCY | LIGHT



MAKO

IDEAL PATH OF EGRESS SOLUTION


ARCHITECTURAL EMERGENCY LIGHT

The MAKO-3 is an architectural emergency egress light fixture offering in a low-profile, very attractive housing. The sleek design blends seamlessly into any installation and provides a contemporary alternative to typical "bug-eye" units. The MAKO-3 is ideal for retail stores, hotels, schools, restaurants, office building and outdoor applications. The perfect solution for wet locations and cold environments.

BENEFITS & FEATURES

ALL MODELS

- Compact, low-profile, architectural design with die-cast aluminum housing
- Available in Nickel, Black, Dark Bronze and White
- Provides a minimum of 90 minutes illumination for the rated wattage upon loss of AC power.
- Two 6W Xenon lamps offer more light output than standard incandescent lamps
- Polycarbonate lens and mirrored reflector for maximum light efficiency
- Maintenance-free Nickel-cadmium battery is standard
- Dual-voltage input capability (120/277V).
- Suitable for Wet Locations-Cold Weather Option available
- Temperature Rating: 32°F to 122°F Standard and -40°F to 122°F with cold weather option
- Low-profile, integrated test switch/pilot light located below the lens.
- Rigid conduit entry provision on top of the unit or simple wall mount
- Optional photocell controlled LED's offer a decorative feature
- Optional self-diagnostics available
- Remote version available for exterior use.
- Listings: ETL Listed for Wet Locations Meets UL 924, NFPA 101, NFPA 70-NEC and OSHA illumination standards.

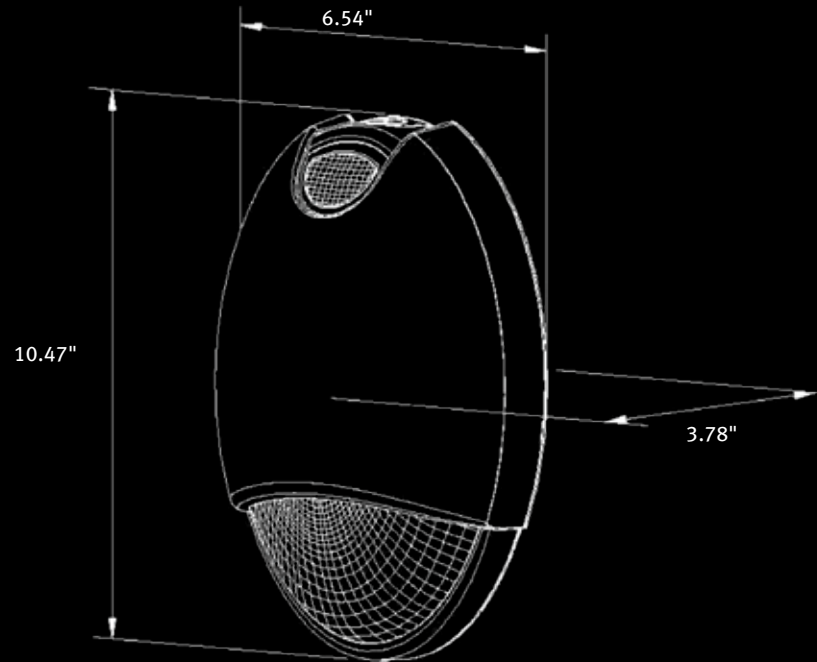

HOUSING OPTIONS



Nickel



Black



Dark Bronze



White



SELF-DIAGNOSTICS

Optional "SD" Self-Diagnostic circuitry monitors battery, charger, transformer and lamps automatically to ensure trouble-free operation of the entire unit. Failure in any of these areas is immediately communicated with a dual-color LED, which will flash a fault code until the failure has been corrected.

Automatic testing occurs on a regular schedule, featuring one minute tests every 28 days, 30 minute full-function tests every six months, and 90 minute full-function tests every 12 months. Testing can also be initiated manually by use of the test button.

PHOTOCELL/ LED OPTION (PCL)

Optional, photocell activated LED illumination provides attractive up/down accent or security lighting in dark conditions provided the unit is not in the emergency mode. White, green, blue and amber LED colors are available to match any decor.

REMOTE UNITS

The MAKO-3 is also available for use as a remote unit, supplied without battery or charging circuit. The remote unit can be run off any standard 6 volt emergency lighting unit that provides a minimum of 12 watts of remote capacity.

LIGHT MODES

DAY TIME
NO LIGHTS ON



EMERGENCY
BOTTOM LIGHT
2 XENON LAMPS 6V 6W



LIGHT MODES

Night time (optional) LED accent light



ORDERING INFORMATION

MODEL	HOUSING COLOR	OPTIONS	LED COLOR (PCL OPTION)
MAKO-3	NK= Nickel	SD= Self Diagnostics	W=White
	BK=Black	CW= Cold Weather Package	G=Green
	DB= Dark Bronze	PCL= Photocell w/ Accent LED's	B=Blue
	WH= White	RM= Remote Unit	A=Amber

Ordering Example: MAKO-3-RM

Distributed /Represented By:



Mule Lighting Inc.
46 Baker Street
Providence, RI 02905

toll-free: 800-556-7690

tel: 401-941-4446

fax: 401-941-2929

www.mulelighting.com

info@mulelighting.com

cSc-0214