



# MX Series

CONTRACTOR GRADE THERMOPLASTIC LED EXIT



PROJECT: \_\_\_\_\_  
 FIXTURE TYPE: \_\_\_\_\_  
 LOCATION: \_\_\_\_\_  
 CONTACT/PHONE: \_\_\_\_\_

## PRODUCT DESCRIPTION

Vj g'O Z 'Ugt lgu'eqo dlpgu'cp'vntc/urko 'r qnf ectdqpcvg'j qwulpi 'cpf 'f gr gpf cdrg'O wrg" NGF 'r gthqt cpeg'q'i kxg' { qw'c'xgtucvrg'cm/lp/qpg.'43uv'egpwt { 'f guki p0Vj ku't vn' " wplxgtucrn'gzk'v'li p'lpemf gu'y g'ecpqr { 'cpf 'gz'vc'hcegu'ht'cp' | 'cr r n'ecv'kp0' kpu'cme'v'kp'ku'cee'go r'ht'j gf 'lp'o' kpwgu'y kj 'qwt'v'q'q'n'rguu.'"Upcr /k'p' 'f guki p0' Cxcl'ndng'y kj 't'gf 'qt' i' tggp'gp'gti { 'gh'le'k'p'v'NGF 'h'i j 'v'lu'wtegu'v'q't' t'qx'f g' { g'ctu'q'h' o' cl'p'v'p'c'peg'lt'gg'"kmo' k'p'v'k'p'c'v'c'o' l'p'ko' c'ri'eq'u0

## PRODUCT SPECIFICATIONS

### CONSTRUCTION

Kpl'ge'v'k'p'o' q'nf'gf. 'gpi' k'p'g'gt'k'pi /i' t'cf'g. 'WX' /u'cd'ng'y' g'to' q'r' n'c'v'k'e'É'WN; 6X/2' h'ro' g' t'c'v'k'pi' É'K0' r'cev'v'et'c'v'j. 'h'cf' g'c'p'f' "eq'tt'q'ul'q'p' /t'g'u'k'v'c'p'v'É'F' v't'cd'ng'v'w'p'k'd'q'f { 'j' q'w'ul'p'i' " h'co' g'y' k'j' 'k'p'v'gi' t'c'ri'y' k't'k'pi' 'e'j' c'p'p'g'ri'É'U'p'cr /h'v'h'c'eg'r' n'v'g'c'p'f' 'd'c'ent'r' n'v'g'É'U'g'e'q'p'f' " h'c'eg'r' n'v'g'k'p'em'f' g'f' 'h'q't' 'f' q'w'd'ng' 'h'c'eg'c'r' r' n'ec'v'k'p'u'É'80' h'g'w'g't'u'y' k'j' '5' l'60' v'ut'q'ng'y' k'f' j' 'É' E'j' g'x't'q'p' 'f' k'g'e'v'k'p'c'ri'k'p'f' k'ec'v'q't'u'c'ep' 'd'g' 'g'c'uk'k' 't'go' q'x'g'f' 'q't' 't'g'k'p'ug't'v'g'f' 'c'u'p'g'e'g'u'uct' { 'É' T'g'f' 'q't' 'i' t'ggp' h'g'w'g't'u'É'Y' j' k'g' 'q't' 'd'r'e'n'i'v'g'z'w't'g'f' 'h'k'p'k'ij' 0

### ELECTRICAL

F'v'e'n'i'x'q'nc'i' g'342'499'X'CE'É'T'c'v'g'f' 'h'q't' 'v'ug'k'p' 'f' c'o' r' 'h'q'ec'v'k'p'u'É'U'q'rk'f' 'u'v'c'v'g' 'e'j' c't'i' k'pi' " c'p'f' 'u'y' k'ej' k'pi' 'É'D't'q'y' p'q'w'r' t'q'v'g'e'v'k'p' 'É'D'c'v'g't' { 'h'y' 'x'q'nc'i' g'f' k'ue'q'p'p'g'ev'É'Q'x'g't'q'f' " c'p'f' 'h'y' k'j' v't'k'ew'k'r' t'q'v'g'e'v'k'p' 'É'CE' 'r' q'y' g't' 'l'p'f' k'ec'v'q't' 'c'p'f' 'v'g'u'v'y' k'ej' 0

### LAMPS

N'q'p'i' 'h'k'g' 'g'p'g't'i' { 'u'c'x'k'pi' 'NGF' 'h'co' r' u'É'T'g'f' 'q't' 'i' t'ggp' 'NGF' h'g'w'g't'u'É'U'k'i' p'u'eq'pu'wo' g'h'g'u'u' 'v'j' c'p' '6'y' c'w'u0

### BATTERY

U'c'p'f' c't'f' 'g'z'k'v'k'i' p' 'u'w'r' r' n'k'g'f' 'y' k'j' 'P'k'É'c'f' 'd'c'w'g't' { 'TGO' 'c'p'f' 'TGO' 4' 'q'r' v'k'p' 'u'w'r' r' n'k'g'f' 'y' k'j' " n'g'c'f' 'e'c're'k'wo' 'd'c'w'g't' { 'É'U'c'p'f' c't'f' 'd'c'w'g't' { 'y' k'ri'q'r' g't'c'v'g' 'u'k'i' p' 'h'q't' 'c'o' l'p'ko' w'o' "q'h'; 2'o' k'p'w'g'u' " k'p'v'j' g' 'g'x'g'p'v'q'h'c' 'r' q'y' g't' 'q'w'c'i' g'É'TGO' 'x'g't'uk'p' 'y' k'ri'q'r' g't'c'v'g' 'y' g' 'u'k'i' p' 'r' n'u'u' 'c'p' 'c'f' f' k'k'q'p'c'ri' 33Y' 'q'h' 't'go' q'v'g' 'h'q'c'f' 'É'TGO' 4' 'x'g't'uk'p' 'y' k'ri'q'r' g't'c'v'g' 'u'k'i' p' 'r' n'u'u' 'c'p' 'c'f' f' k'k'q'p'c'ri' 44Y' 't'go' q'v'g' " n'q'c'f' • Temperature rating is 0-40 degrees C.

### CODE COMPLIANCE

WN; 46'É'F' c'o' r' 'h'q'ec'v'k'p' 't'c'v'g'f' 'É'P' HRC'323' N'h'g' 'U'ch'g'v'f' 'E'q'f' g' 'e'q'o' r' n'k'c'p'v'É'P' GE' 'c'p'f' " Q'U' 'C' 'e'q'o' r' n'k'c'p'v'0

### WARRANTY

5-year warranty. Product specifications subject to change without notice.

## INSTALLATION

### MOUNTING

O'c' { 'd'g' 'q'r' 'd'c'ent'iq't' 'g'p'f' 'o' q'w'p'v'g'f' 'É'C'm'li'k'i' p'u'k'p'em'f' g's' w'len'i'k'p'uc'm'l'p'c'r /h'v'ec'p'q'r' { 'c'p'f' " o' q'w'p'v'k'pi' 'j' c't'f' y' c't'g' 'h'q't' 'g'c'u' { 'q'r' 'q't' 'g'p'f' 'o' q'w'p'v'k'p'uc'm'e'v'k'p' 'É'D'c'ent'r' n'v'g'k'p'em'f' g'u' " w'p'l'x'g't'uc'ri'0 q'w'p'v'k'pi' 'r' c'w'g't'p' 'h'p'q'ent'v'w'u' 'h'q't' 'u'k'o' r' n'g' 'd'c'ent'io' q'w'p'v'k'pi' 0


## ORDERING INFORMATION

model	operation	color (Letters)	faces	options	æ&• [ iã• <sup>5</sup>
MX	A = AC Only B = Battery Backup	R = Red G = Green	U <sup>1</sup> = Universal	SD <sup>2</sup> = Self-Diagnostics BL <sup>3</sup> = Black Housing DLC <sup>3</sup> = Dual Circuit Input	Y I 4 <sup>6</sup> = Y k'g'I' w'ct'f' "y' c'm'io' q'w'p'v+ Y I 5 <sup>6</sup> = Y k'g'I' w'ct'f' "e'g'k'ng' 'o' q'w'p'v+ VRS1 <sup>1</sup> = Polycarbonate Vandal Shield
Notes				TGO <sup>6</sup> = Tgo q'v'g' 'E'c'r' c'd'ng' "33Y +	PKMX1 <sup>1</sup> = 1ft Pendant Mount Kit
1 Universal includes 2nd exit face, backplate and canopy				TGO 4 <sup>6</sup> = Tgo q'v'g' 'E'c'r' c'd'ng' "44Y +	PKMX2 <sup>1</sup> = 2ft Pendant Mount Kit
2 Not available on AC units				UN <sup>1</sup> = U'r' g'el'c'ri' N'g'w'g't'k'pi	
3 AC only, for use with inverter or generator applications only				WUC <sup>1</sup> = C'u'g'o' d'ng'f' 'l'p' WUC	
6 H'v'it'g'o' q'v'g' 'h'q'c'f' 'o' w'u'v'g' 'e'q'p'p'g'ev'g'f' 'y' j' g'p' 'v'ug'f' 'y' k'j' 'U'F' 'q'r' v'k'p'				IRT <sup>1</sup> = I'n'f'r'a'r'e'd' R'e'm'o't'e' T'e's't'ing	
5 Order as separate line item. Field installation				SV <sup>1</sup> = S'p'e'c'i'a'l' V'o'l't'a'g'e' (s'p'e'c'i'f'y)	

Ordering Example: MXBRU-SD-USA



U'c'p'f' c't'f' 'X'g't'uk'p'

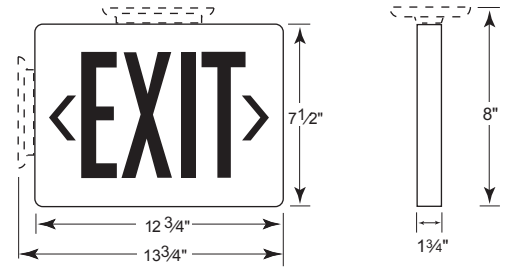

Q'r' v'k'p'c'ri' TGO 'c'p'f' 'TGO' 4' 'X'g't'uk'p'

