

Job/Location: \_\_\_\_\_  
 Contractor: \_\_\_\_\_  
 Prepared By: \_\_\_\_\_

Job Type: \_\_\_\_\_  
 Date: \_\_\_\_\_




### ■ weather proof emergency remote

The **NFR** series of NEMA 4 and 4X weatherproof remotes are constructed from durable polycarbonate and are designed to perform in harsh environments. The base is constructed of impact and corrosive resistant Valox® for maximum durability. A plated steel bracket attaches the reflector to the base plate using a threaded nipple and lock nut for tool-less lamp adjustability and ease of relamping. The base plate and polycarbonate cover join together to form a complete assembly that is fully gasketed. The **NFR** series is designed with several surface conduit knockout points for ease of installation. The operating temperature is from -22°F up to 104°F (-30°C up to 40°C).

### ■ sanitation listed (sl)

The Beghelli **NFR** is sanitation listing approved. The Intertek verified splash zone listing is equivalent to the NSF standard 2, meeting the rigorous sanitation, electrical safety and performance standards of food service environments.

### ■ dimensions (in, mm.)

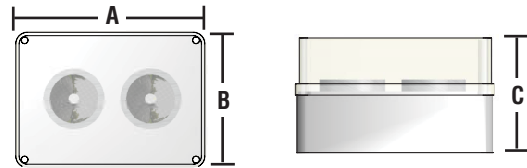

Series	A	B	C
NFR-1	127mm 5"	127mm 5"	102mm 4"
NFR-2	178mm 7"	127mm 5"	102mm 4"

### ■ ordering logic

Series	Head #	Voltage / Wattage	Options
NFR	1 (single head)	See lamp selection	TPS (Tamper proof screws)
	2 (double head)		KO (Knockouts on housing) LC (less canopy)

Note: Maximum fixture capacity is 70W

### ■ lamp selection

	6V	12V	24V	120V
Incandescent	5.4W, 7.2W, 9W	9, 12, 18W	9, 18W	N/A
Halogen (H)	12, 20W	12, 20W	12, 20W	N/A
MR16	6, 10W	12, 20, 35, 50W	12, 20, 35, 50W	35W
MR16 LED	5, 7W	2, 5, 7W	5, 7W	N/A