



Glo Brite® P50 Exit Signs

Going green does not have to be expensive

Job Name: _____
Type: _____
Approved By: _____
Distributor: _____

FEATURES:

- Requires no additional electricity to operate
- Can be used for both high-level and low-level applications
- Requires virtually no maintenance, periodic inspections, for 25+ years
- Thin, low profile construction
- Reliability
- Non-toxic, non-radioactive
- Low-cost, easy installation
- Designed for surface mounting
- Consistent, uniform illumination
- Visible at 50 feet
- Saves on energy cost

TECHNICAL INFORMATION:

Sizes: 7.5" x 13" x .075"
 Letter size: .8125" stroke with 6" height
 Background: Photoluminescent
 Illumination: High Visibility Green
 Visibility: 50 feet
 Directional: 2 included (field applied)
 Construction: Plastic photoluminescent panel/red or green lettering with acrylic or aluminum frame
 Durability: Explosion-proof for areas requiring explosion-proof exit signage

TESTS PASSED:

UL 924 Emergency Lighting and Power Equipment Listed through UL;
 Meets NFPA Life Safety Code 101 and OSHA requirements;
 International Building Code 2009/2012/2015
 International Fire Code 2009/2012/2015
 Listed for LED lighting

LIFE EXPECTANCY: 25+ years

POWER REQUIREMENTS:


NO additional electrical or mechanical source required

INSTALLATION:

Surface, ceiling or flag mounted. Before installation it must be determined that there is a minimum of 5 Fc of LED, fluorescent, metal halide or mercury vapor light on the face(s) of the sign at all times during building occupancy.

APPLICATIONS:

Both high-level and low-level
 Suitable for floor proximity installation

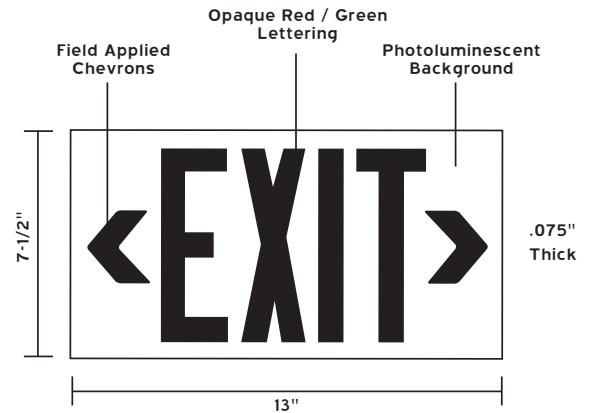

Acrylic Framing System Ceiling Mount



Aluminum Framing System Ceiling Mount

Catalog #	Letter Style	Letter Color	Chevrons	Frame	No. of Faces	Mounting Bracket
7	2 - Printed Letters	1 - Red 2 - Green	0 - With Chevrons (field applied) included	SAF - Silver aluminum ACR - acrylic	2 - Double Sided	B
7	2	_____	0	_____	2	B

(fill in for model #)



Jessup Manufacturing Company
 ph: 815.385.6650
 fax: 815.385.0079
 Internet: www.jessupmfg.com
 E-mail: jmc@jessupmfg.com

Other photoluminescent components of the Glo Brite® Safety Guidance System include: Glo Brite® Egress Pathway Strips, Glo Brite® Tape, Glo Brite® Dots and Arrows, Glo Brite® Stripe Tape, Glo Brite® Safety Track, and Glo Brite® Safety Signage.

