

SERIES PG, P12G




Industrial / Commercial Unit Equipment 6 or 12 Volt Maintenance-free Lead Calcium Battery

**Black Housing
Available**

Dimensions are approximate
and subject to change.



CAL#32651

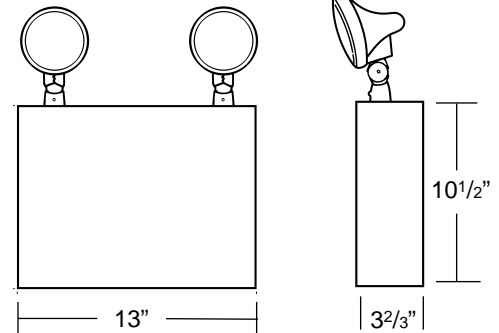

application Traditional styling designed to meet most requirements for moderate loads. Reliable, economic units for all public areas.

features

- **HOUSING:** Heavy duty steel case with front access panel and mist white enamel finish.
- **MOUNTING:** Conduit knockouts and rear keyhole mounting slots are provided.
- **ELECTRONICS:**
 - Automatic, temperature compensated, pulse type charger.
 - High capacity, automatic, dust tight instantaneous transfer relay.
 - Low voltage disconnect prevents overdischarge of battery. Automatic brownout protection is provided.
 - Labor saving AC line latch prevents battery discharge during installation to a non-energized circuit.
 - Fused output circuit (PG2, P12G1).
- **CONTROLS:**
 - Red charge monitor LED indicates state of charge of the battery.
 - Orange AC-ON LED indicates AC power is on.
 - Momentary test switch allows for quick operational check of entire system.

- **POWER REQUIREMENTS:**
120/277 Volt AC, 0.25A, 30W (max)

battery

6 or 12 volt, long life, maintenance-free sealed lead calcium.

lamp heads

PAR 36 size, high impact mar-resistant thermoplastic heads, furnished with high intensity incandescent lamps.

Note: Optional lamps available. Specify lamp suffix from chart on pages 62-63.

options


- (Add Suffix to Model No.) Suffix**
- Black Housing and Heads**-B**
 - Voltmeter (Not available with diagnostics) . . .**-V**
 - Disconnect Switch**-DS**
 - Improved Diagnostics**-ID**
 - Improved Diagnostics (Non-audible) . . .**-IDNA**
 - Self Diagnostics**-SD**
 - Time Delay**-TD**
 - Tamper Proof**-TP**
 - 3-wire Cord & Plug**3CP**
 - 3-wire Cord & Plug (277V)**3CP-277**

accessories

- (Order as separate item) Model**
- Guard**WG2**
 - Mount Platform**MP-PQA**

Note: Certain option combinations may effect the UL listing. Please contact the factory for specifics.

ordering format

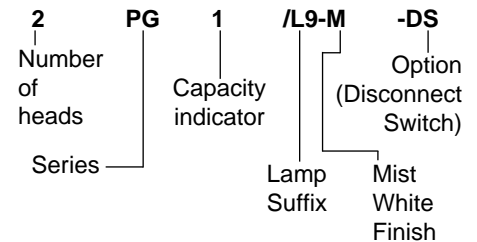

unit selection chart

Volts	Model No. (unit/Lamp Suffix)	Capacity in Watts to 87 1/2 % of Nominal Battery Voltage				Standard Lamps		
		1 1/2 Hrs.	2 Hrs.	3 Hrs.	4 Hrs.	Watts/ Heads	Type	Lamp Rplc. No.
6	2PG1/L9-M	18	15	—	—	9	Incand.	570.0016
	2PG2/L9-M	54	36	27	18	9	Incand.	570.0016
12	2P12G1/L18-M	54	36	27	18	18	Incand.	570.0029