



Remote Lighting Heads

PGR

High Performance LED Remote

FEATURES

The PGR offers LED performance in a remote fixture. Architectural style for indoor or outdoor application. The unit is illuminated by 4 high power LED's arranged so that in the event of 1 or 2 LED failures the unit will continue to operate. The PGN accepts DC voltage which must be supplied from an external 6-12V DC emergency lighting unit. Housing and mounting plate are constructed of 1/8" die-cast aluminum and sealed with a 1/8" closed-cell silicone gasket. Housing finish is powder coated electro-deposition paint available in four colors: dark bronze, white, platinum silver and black. Remote can be wall-mounted by use of a universal molded-in template. Wired from the j-box through the back or through a conduit entry at the top.

Input Power Requirements

12 watts at 6vDC, 13 watts at 12vDC

Specific LED information

Lamp Color: neutral White, 4000K

Color Rendering Index(CRI): 75


Total Lamp Output: 445 Lumens min. Initial

LED Lamplife: 48,000 hrs. at 70% of Initial

U.S. Patent No. D627,916

ORDERING GUIDE

PGR



Catalog Number	
Comments	Type



White



Black

LZR Series


Matching Remote Lighting Heads

FEATURES

Architectural/commercial design. High performance MR-16 halogen lamps standard. Mounts to standard electrical boxes using universal mounting plate provided. Fixture housing mounts to back plate in a choice of four mounting positions. Housings secured using locking screws provided.

ORDERING GUIDE

LZR

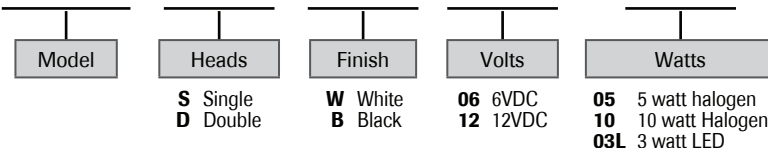

Catalog Number	
Comments	Type

