

Job/Location: _____	Job Name: _____
Specifier: _____	Date: _____
Prepared By: _____	




## ■ internal specifications

The **Pluraluce® INDOOR** unit is configured with a two-wire 120-347VAC 50/60 Hz input. Solid state microprocessor controlled circuitry also includes line latch, brownout protection, battery and charge circuit monitoring, LED failure detection and reverse polarity protection. Ni-MH batteries are standard. Fuse protection is standard.

## ■ external specifications

The compact design of the **Pluraluce® INDOOR** unit has a modern look that blends seamlessly in today's commercial environments. The cast aluminum cover comes standard in a white powder coat with optional painted or brushed finishes. The housing design acts as a large heat sink ensuring efficient thermal management and long operating life of the LEDs. SE and SA models feature an external test switch, allowing maintenance personnel the ability to quickly perform tests and determine the operational status by way of a multi-colored diagnostic LED.

## ■ dimensions (in,mm)

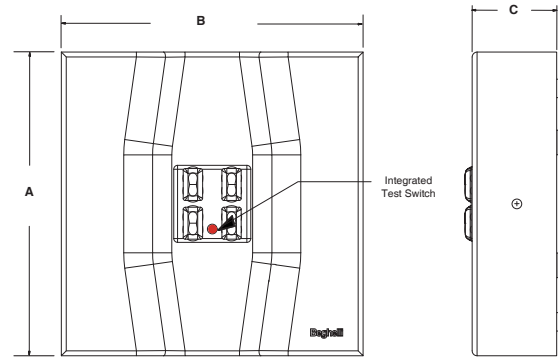

Series	A	B	C
PL	6 1/4"	6 1/4"	1 3/4"
	159mm	159mm	44mm

## ORDERING LOGIC

Series	Operation	Voltage	Options
PL	HT (AC Only - Normally On)	120-347V	AT (autotest)
	SE (Emergency - AC Fail only)		120SP (120 min. emergency)
	SA (Self powered - Always On/Emergency Backup)*		CC (custom color - specify)
			BA (brushed aluminum finish)
			B (black finish)
			TP (tamper proof screws)

NOTE: \*Unit is always on and cannot be switched on and off.

EXAMPLE: PL-HT-120-347V

DESCRIPTION: Pluraluce® INDOOR SURFACE MOUNT, AC ONLY, 120-347V, WHITE FINISH

## ■ led technology

The **Pluraluce® INDOOR** unit is illuminated with four 2.5W Samsung LEDs laid in parallel on the LED module. This provides redundancy should one pair fail, the other will remain illuminated. A high-efficiency LED driver is used to maintain a constant output current to all LEDs. The **Pluraluce® INDOOR** unit delivers between 782lm - 845lm depending on configuration.

## ■ battery specifications

The SE and SA models come standard with a Ni-MH battery pack that provides a minimum of 90 minutes emergency duration. Optional 120 minute Ni-MH batteries are available. The maximum battery operating temperature is +104°F (+40°C) and the minimum is +50°F (+10°C).

## ■ charger specifications

The **Pluraluce® INDOOR** unit utilizes a high-efficiency two stage charger providing precise float voltage control with low voltage disconnect protection. Program controlled trickle charge current is provided by the charging unit in order to maintain the optimum performance of the Ni-MH battery. All components used in the circuitry are temperature compensated. The charger also has brownout and short circuit protection. Charger status is easily determined via a multi-colored diagnostic LED indicator which displays AC/ON and High Charge. An external push button test switch allows maintenance personnel to quickly activate any manual tests on the fixture.


## ■ optics

The **Pluraluce® INDOOR** unit is supplied with three (3), optical grade polycarbonate lenses. The symmetrical ceiling distribution pattern is ideal for use in open areas with spacing of up to 46.5' on center. The asymmetrical ceiling distribution pattern is designed for use in corridors with spacing of up to 60' on center. The asymmetrical wall distribution pattern provides 55' on center with a 6' wide path of egress. HT and SA models come standard with frosted lenses.


## ■ optical lens distribution patterns

1. Corridor dimensions: 150' long, ceiling height - 10', width - 6'.
2. Path of egress 3" wide.
3. Room reflectance: 80/50/20
4. For wall mounted option, fixture height will be at 7.5'.

### 1FC AVERAGE

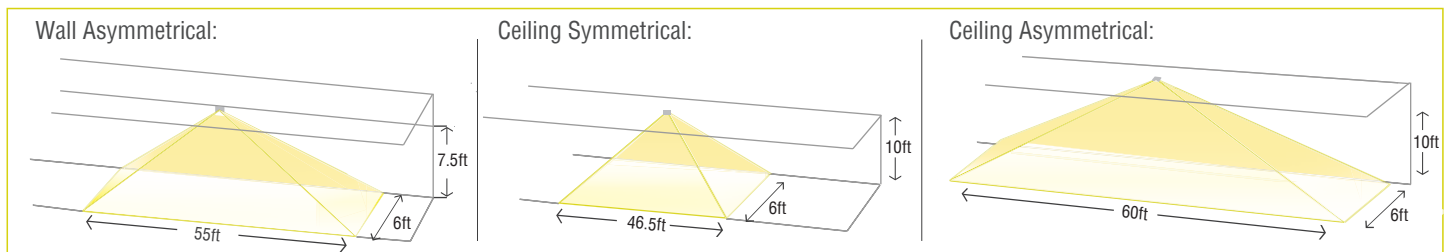

### 1FC MIN

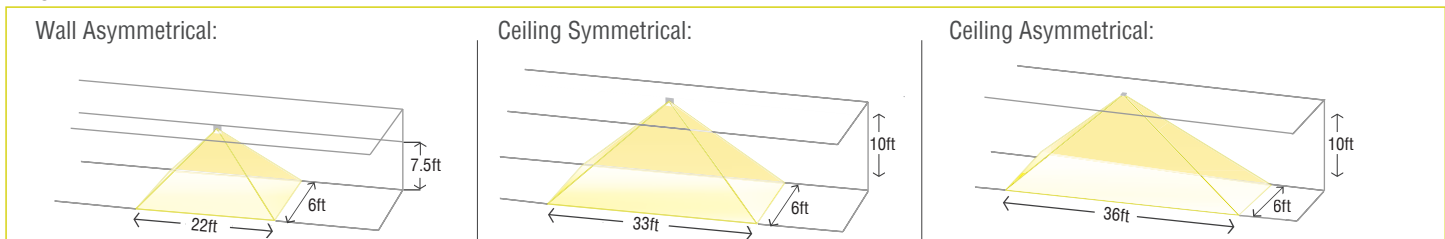

## ■ ac input rating

Operation	Voltage (VAC)	Wattage (W)	Rated Current (A)
HT	120-347	13.0-13.1	0.25-0.15
SE	120-347	4.5-5.0	0.15-0.10
SA	120-347	17.3-17.0	0.35-0.25

## ■ autotest

SE and SA models are available with the optional Beghelli autotest system that automatically performs one 5 minute discharge test monthly and every 6 months it performs two full discharge tests, 24 hours apart. This tests both full battery capacity and recharge capability. The information is communicated simply and intuitively to maintenance personnel via a single multi-color LED. A manual test feature is included when the autotest option is selected. The manual test will run a 30 second, 15 minute or 90 minute test by pressing the correct sequence of the test switch.

## ■ fcc

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

## ■ installation

The **Pluraluce® INDOOR** is suitable for indoor surface wall or ceiling mounting on a junction box or suspended by a pendant kit. Side knockouts for conduit entry.

## ■ warranty

The **Pluraluce® INDOOR** comes with a 3-year factory warranty. Deliberate damage, misuse, improper installation effectively cancel the warranty.