

## Premier™ Combination Series

Specification-grade, LED, thermoplastic, snap-together combination unit



—  
01  
Remote capable  
exit sign



nexus



Nexus®Pro



### Construction

- White or black UV stabilized thermoplastic enclosure
- Clear polycarbonate lens covers
- Choice of MR16 LED lamp wattages
- 6 inch EXIT lettering legend, available in red or green
- Field-selectable chevrons

### Mounting

- Surface mount
- Canopy included for ceiling mount applications
- Universal J-box mounting

### Choice of battery

- 6V or 12V lead-calcium battery
- 6V or 12V nickel-metal hydride battery

### Special wording panels

- Available, contact your sales representative with your design requirements

### Electronics

- Optional Advanced Diagnostics
- Optional Nexus®Pro IoT monitoring system
- Optional Nexus® wired and wireless monitoring system
- 120/277 60Hz

### Approvals


- UL 924 standards listed
- Nickel-metal hydride battery combination units UL listed for damp location (50°F to 104°F, 10°C to 40°C)
- Meets NFPA101 (Life Safety Code), NFPA 70 NEC, OSHA illumination standards

### Warranty

- Unit has a five-year warranty
- Detailed warranty terms located on page 202 or online at:  
[www.emergi-lite.com/usa/files/EL\\_Warranty.pdf](http://www.emergi-lite.com/usa/files/EL_Warranty.pdf)

### Photometric performance

Lamp	Spacing center-to-center (feet)	
	7' mounting height	15' mounting height
LA	39'	34'
LB	74'	57'
LG	49'	39'
LI	68'	54'
LJ	89'	80'

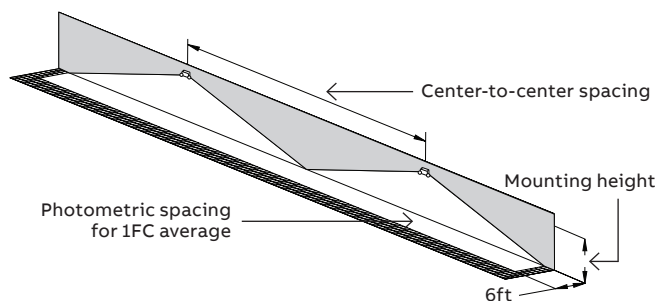

### Housing color



White



Black


## Double face configurations

### Convert single face to double face in the field

Red/white	005715-E
Red/black	005716-E
Green/white	005717-E
Green/black	005718-E

### Dimensions

Dimensions are approximate and subject to change.

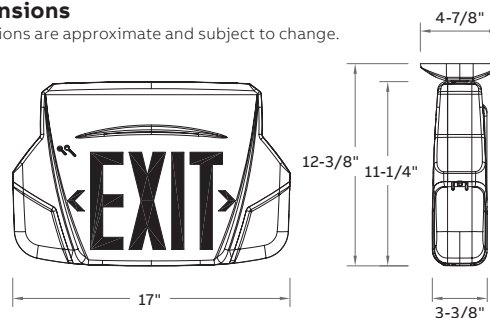

## Power consumption and unit rating

Exit sign module	Battery type	AC specs	1-1/2 hrs	2 hrs	3 hrs	4 hrs
612M	Lead-calcium	120/277VAC, 60HZ	0.11 / 0.05 A	12	8	–
624M	Lead-calcium		0.11 / 0.05 A	24	16	12
1224M	Lead-calcium		0.22 / 0.08 A	24	16	12
612H	Nickel-metal hydride		0.11 / 0.05 A	12	9	–
1224H	Nickel-metal hydride		0.22 / 0.08 A	24	18	12
1240H	Nickel-metal hydride		0.22 / 0.08 A	40	30	20
1250H	Nickel-metal hydride		0.22 / 0.08 A	50	36	24

## Accessories (order as a separate item)

Description	Suffix
Wire guard (wall mount)	WG2-E
Pendant white	PRE-P-WH <sup>1</sup>
Pendant black	PRE-P-BK <sup>1</sup>

<sup>1</sup>Specify pendant length in inches

## How to order

Housing color	Series	Voltage/capacity/battery	Faces	Legend color
W= White B= Black	PR= Series	<b>Lead-calcium</b> <b>612M</b> = 6V-12W, lead-calcium <b>624M</b> = 6V-24W, lead-calcium <b>1224M</b> = 12V-24W, lead-calcium  <b>Nickel-metal hydride</b> <b>612H</b> = 6V-12W, NiMH, rated damp location <b>1224H</b> = 12V-24W, NiMH, rated damp location <b>1240H</b> = 12V-40W, NiMH, rated damp location <b>1250H</b> = 12V-50W, NiMH, rated damp location	<b>1</b> = Single face (ceiling or wall mount) <b>1N</b> = Single face no canopy (wall mount) <b>2</b> = Double face (ceiling mount) <b>4</b> = Universal (2 faces, back plate and canopy)	<b>G</b> = Green legend <b>R</b> = Red legend

# of heads	Lamp type/wattage	Options	
<b>Blank</b> = No heads <b>2</b> = Two heads	<b>LA</b> = 6V-4W, MR16 LED <b>LB</b> = 6V-5W, MR16 LED <b>LG</b> = 12V-4W, MR16 LED <b>LI</b> = 12V-5W, MR16 LED <b>LJ</b> = 12V-6W, MR16 LED	<b>Blank</b> = No option <b>-AD</b> = Advanced Diagnostics (audible) <sup>1</sup> <b>-ADNA</b> = Advanced Diagnostics (non-audible) <sup>1</sup> <b>-NEX</b> = Nexus® wired <sup>1</sup> <b>-NEXP</b> = Nexus® Pro IoT <sup>1</sup> <b>-NEXRF</b> = Nexus® wireless <sup>1</sup>	<b>-BA</b> = Brushed aluminum exit stencil <b>-D3</b> = Time delay (15 minutes) <b>-FA</b> = Fire alarm activated flasher <b>-FBF</b> = Flasher buzzer + fire alarm activated flasher <b>-FL</b> = Flasher <b>-FZ</b> = Flasher buzzer <b>-VR</b> = Tamper-proof screws <sup>2</sup> <b>-VR1</b> = Polycarbonate shield with tamper-proof screws <sup>1</sup>

Example: WPR612M1R2LA

<sup>1</sup>Not available with 1250H, must connect minimum 20% load capacity

<sup>2</sup>Not available with universal faces