

# Prestige™ Economizer Series – Recessed ceiling mount

Edge-lit exit sign



### Construction

- Steel housing with extruded aluminum trim plate
- Panel features a curved contour for maximum illumination and clarity
- 6 inch EXIT lettering legend available in red or green
- Field installed stick-on chevrons
- Choice of housing and trim plate finishes, off white or textured aluminum

### Mounting

- Fully recessed ceiling mount
- Hanger bars included for lay-in installation in T-bar grid

### Special wording panels

- Available. Contact your sales representative with your design requirement

### Electronics

- 120/277 60Hz


### Approvals

- UL 924 listed
- Meets NFPA101 (Life Safety Code), NFPA 70 NEC, OSHA illumination standards

### Warranty

- Unit has a five-year limited warranty  
Detailed warranty terms located on page 178 or online at:  
[www.emergi-lite.com/usa/files/EL\\_Warranty.pdf](http://www.emergi-lite.com/usa/files/EL_Warranty.pdf)

### Housing color




### How to order – Recessed mount series

Housing color	Series	Trim	Face	Legend color
TA= Textured aluminum	PE= AC	F= Recessed flat trim	1= Single face	RC= Red on clear <sup>1</sup>
OW= Off white	PES= AC/DC		2= Double face	RW= Red on white
	PEN= Self-powered			RM= Red on mirror
				GC= Green on clear <sup>1</sup>
				GM= Green on mirror

Example: TAPEF1RC

### Dimensions

Dimensions are approximate and subject to change.

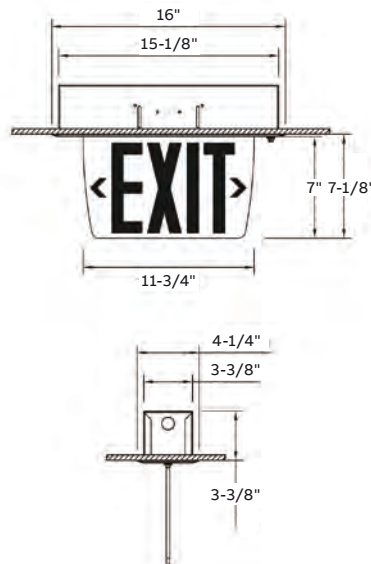

### Power consumption

Model	AC specs	DC specs
AC-only	120 to 277VAC Less than 1.5W	-
AC/DC-remote	120 to 277VAC Less than 1.5W	6 to 24VDC Less than 1.5W
Self-powered	120 to 277VAC Less than 2.5W	Ni-Cd battery Min. 90 minutes

<sup>1</sup>Single face only

## Prestige Economizer Series – Slim profile surface mount

LED edge-lit exit sign



### Construction

- Die-cast aluminum housing
- Panel features a curved contour for maximum illumination and clarity
- 6 inch EXIT lettering legend available in red or green
- Field installed stick-on chevrons
- Choice of housing and trim plate finishes, off white or textured aluminum

### Mounting

- Surface mount
- Canopy included for wall, end or ceiling mount applications

### Special wording panels

- Available. Contact your sales representative with your design requirement

### Electronics

- 120/277 60Hz


### Approvals

- UL 924 listed
- Meets NFPA101 (Life Safety Code), NFPA 70 NEC, OSHA illumination standards

### Warranty

- Unit has a five-year limited warranty  
Detailed warranty terms located on page 178 or online at:  
[www.emergi-lite.com/usa/files/EL\\_Warranty.pdf](http://www.emergi-lite.com/usa/files/EL_Warranty.pdf)

### Housing color



### How to order – Surface mount series


Housing color	Series	Face	Legend color
TA= Textured aluminum	PE= AC	1= Single face	RC= Red on clear <sup>1</sup>
OW= Off white	PES= AC/DC	2= Double face	RW= Red on white
	PEN= Self-powered		RM= Red on mirror
			GC= Green on clear <sup>1</sup>
			GM= Green on mirror

Example: TAPE1RC

<sup>1</sup>Single face only

### Dimensions

Dimensions are approximate and subject to change.

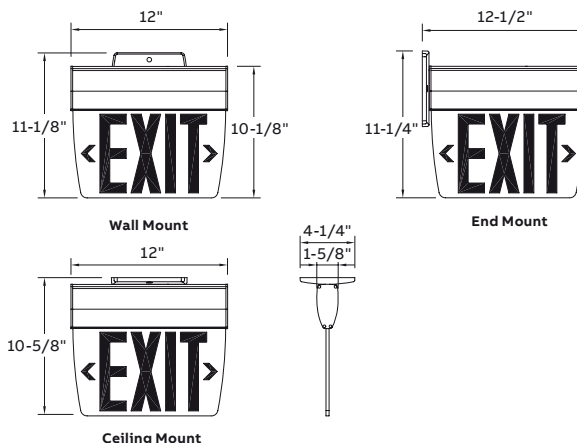

### Power consumption

Model	AC specs		DC specs	
AC-only	120 to 277VAC	Less than 2W	-	-
AC/DC	120 to 277VAC	Less than 2W	6 to 24VDC	Less than 1.5W
Self-powered	120 to 277VAC	Less than 3W	Ni-Cd battery	Min. 90 minutes

### Accessories (order as a separate item)

Description	Suffix
White pendant	PE-P-WH <sup>1</sup>
Black pendant	PE-P-BK <sup>1</sup>

<sup>1</sup>Specify pendant length