PRLEDNYDXR New York City Approved LED Emergency Unit



Project:	
Type:	
Catalog #:	

STANDARD

- **UL Listed**
- NYC Approved

ILLUMINATION

- Adjustable 1.5W square LED lampheads with long lasting & efficient ultra bright white LEDs.
- Field installable third lamp head included with the PRLEDNYDXR-83 model.
- High performance chrome-plated metallized reflector and plastic lens for optimal light distribution.
- Knockouts provided on sides of unit housing to relocate lampheads.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 9.6V maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Remote capable standard.

MOUNTING


- Knockouts on the back for wall mount.
- Side and top knockouts for conduit feed applications.

HOUSING

- Durable powder-coated 20-gauge steel construction in white or black finish.
- Injection-molded engineering grade high-impact thermoplastic heads.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery pro rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C 50°C).

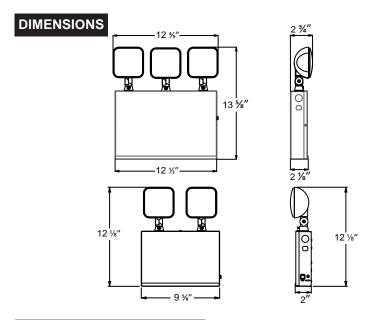

ELECTRICAL INFORMATION

MODEL NUMBER	INPUT WATTS (W)		INPUT AMPS (A)		BATTERY	REMOTE	
	120V	277V	120V	277V		CAPACITY	
PRLEDNYDXR-42	5.0	5.0	0.05	0.03	9.6V	3W	
PRLEDNYDXR-82/83	5.0	5.0	0.05	0.03	9.6V	7.5W–9W	

ORDERING INFORMATION

NOTE	5.
¹ Using	1.5W LED remote heads.

NOTES:		(1141	
¹ Using 1.5W LED remote heads.	PRLEDNYDXR	4	4
² Available only with PRLEDNYDXR-83 model.		8	8

Sample Part I	Number: PR	LEDNYDXR-	-42

MODEL	TOTAL NO. OF HEADS (INTEGRAL + REMOTE')		NO. OF INTEGRAL HEADS		HOUSING COLO	
RLEDNYDXR	4	4 Heads	2	2 Heads	(Blank)	White
	8	8 Heads	3	3 Heads ²		