RH

INCANDESCENT INDOOR THERMOPLASTIC REMOTE HEADS





ILLUMINATION

- Smooth thermoplastic reflector with plastic lens for optimal light distribution.
- Adjustable lamp heads with 6V and 12V wedge base incandescent lamps.

ELECTRICAL

 Powered from low voltage power source with low voltage wiring (not provided).

MOUNTING

- Universal mounting adapter plate included. Mounts to single-gang switch box.
- Distance of maximum run is determined by system voltage, wire gauge and total maximum wattage on the run.
- Suitable for wall or ceiling mount.


HOUSING

 Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.

WARRANTY / LISTING

- Five year warranty.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

DIMENSIONS

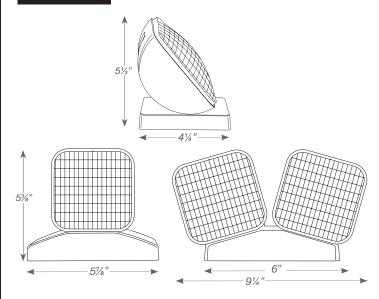

FIXTURE COMPATIBILITY CHART

Reference individual unit equipment specification sheets for remote load capacity availability.

MODEL TYPE	6V	12V
NYDXR-50		Χ
RMR-16-65	Χ	
RMR-16-125		Χ
R-5HO	Χ	
R-16-HO	Χ	
DXR-65/610	Χ	
LEDCADXR	Χ	
LEDSDXR	Χ	
CWLEZXTE-RC	Χ	
CAR-65	Χ	
CAR-125		Χ

MODEL TYPE	6V	12V
TFX-2	Χ	
NYDXR-27	Х	
EZXTE-RC	Χ	
CXTE-RC	Χ	
DXR-125/1210		Χ
CALEDCXTE	Χ	
CADXR-65/610	Х	
CADXR-125/1210		Χ
LEDCADXR	Χ	

Sample Part Number: RH1-6V5.4W

ORDERING INFORMATION

	MODEL	No. of HEADS		COLOR		VOLTAGE		WATTAGE 1	
	RH	1	Single Head	(blank)	White	6V	For Use With 6V	5.4W	5.4 Watts ²
•	www.	eme	Double Head PGENC	/-ligŧn	HARYS.	COM 12V	DC Power Source For Use With 12V DC Power Source	7.2W 12.0W	7.2 Watts 12.0 Watts

¹ Wattage rating stated per head.

² Available in 6V units only.