



RH16LED

LED INDOOR HIGH PERFORMANCE MR-16 THERMOPLASTIC REMOTE HEAD

ACCESSORIES

ILLUMINATION

- Long lasting, efficient ultra bright white LED lamp heads.
- Adjustable lamp heads provides optimal center-to-center spacing.
- 3.3 watt (3 LEDs x 1.1 watt) per head.
- Optional high lumen heads are 5 watt (7 LEDs x 0.7 watt per head) and provide increased center to center spacing.

ELECTRICAL

- Powered from low voltage power source with low voltage wiring (not provided).

MOUNTING

- Universal mounting adapter included. Mounts to single-gang switch box.
- Distance of maximum run is determined by system voltage, wire gauge and total maximum wattage on the run.
- Suitable for wall or ceiling mount.


HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.

WARRANTY / LISTING

- Five year warranty.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

DIMENSIONS

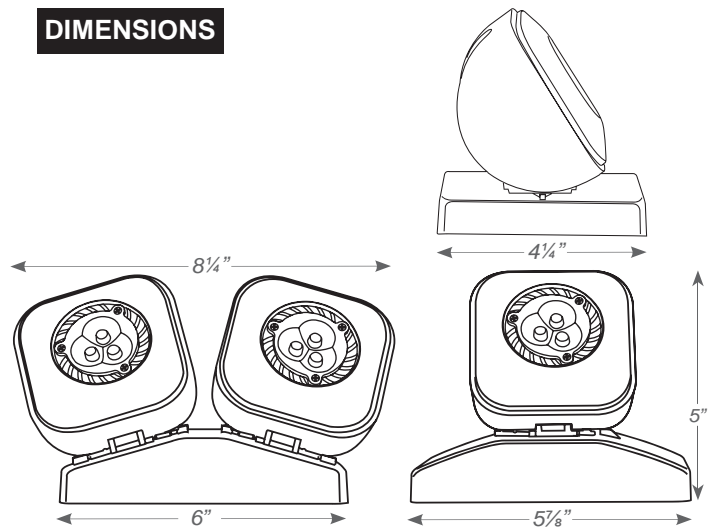

FIXTURE COMPATIBILITY CHART

Reference individual unit equipment specification sheets for remote load capacity availability.

BEST LIGHTING MODEL TYPE			
LEDTFX-2	R-5HO*	TFX-2	EZXTE-RC*
LEDCADXR	R-16-HO*	NYDXR	CLPU-RC
RMR-16-65/125	DXR	CXTEU-RC*	CALEDCXTE
CADXR	LEDCXTEU-RC	LEDR5-HO	CAR
LESDXR	CWLEZXTE-RC	RMCLPU-RC	RMLEDCXTE

* SDT versions of the fixtures are not compatible with the RH16LED heads

ORDERING INFORMATION

Sample Part Number: RH16LED-1-MV

¹ Wattage rating stated per head.

MODEL	No. of HEADS	COLOR	VOLTAGE	WATTAGE ¹
RH16LED	1 Single Head	(blank) White	MV	(blank) 3.3 Watts
	2 Double Head	B Black	For Use With 3.6V, 6V, 9.6V, Or 12V DC Power Source	HL 5.0 Watts

RH16LED