

Commercial Emergency Lights

Series Features

- Integrated Solid State System
- Multi-Rate, Controlled, Automatic Charger
- Lock Out (Automatic Battery Connect)
- Low-Voltage Battery Cutoff
- Brownout Sensitivity
- Dual-Voltage Transformer for 120/277 VAC Operation
- Maximum Input Rating


120VAC	60 Hz	0.35 Amps
277VAC	60 Hz	0.15 Amps



- HIT Lamps
 - PAR-36 Sealed Beams
- STD Lamp: See Unit Information
Opt. PAR-36LED Sealed Beams 5W



- Sealed Lead Calcium Battery (S) or Sealed Nickel Cadmium Battery (N)
- 6-Volt Operation
- Maintenance-Free



- Fully Recessed Styling
- Steel Lamp Heads (Round)
- 20-Gauge Steel Housing
- Polycarbonate Lamp Heads (Rectangular)
- Includes (4) Adjustable Mounting Tabs
- White Powder-Coat Finish
- LED Power On (Charge) Indicator
- Test Switch
- UL Listed

Unit Information

Model Number	Std. Lamp Watt	Watts per Hour								Replacement Battery	Head Shape
		1.5	2	3	4	5	6	7	8		
2RL6S5-R†	6	12	9	6	-	-	-	-	-	(1) S65	Round
2RL6S5-PH	6	12	9	6	-	-	-	-	-	(1) S65	Rectangular
2RL6S8-R†	9	18	14	9	7	-	-	-	-	(1) S68	Round
2RL6S8-PH	9	18	14	9	7	-	-	-	-	(1) S68	Rectangular
2RL6S10-R†	9	32	24	16	12	10	8	7	6	(1) S610SL	Round
2RL6S10-PH	9	32	24	16	12	10	8	7	6	(1) S610SL	Rectangular
H2RL6S10†	12	32	24	16	12	10	8	7	6	(1) S610SL	Round
2RL6N7-R†*	9	18	14	9	7	-	-	-	-	(1) N67F	Round
2RL6N7-PH*	9	18	14	9	7	-	-	-	-	(1) N67F	Rectangular
H2RL6N7†*	8	18	14	9	7	-	-	-	-	(1) N67F	Round

†Chicago Code Approved

Illumination is rated to 87.5% of nominal system voltage and recharge to full capacity within 48 hours.

NEC requires 1.5 hours of emergency illumination.


*Meets or Exceeds UL 924 Requirements.

Ordering Information

LS*	2	RL	6	S	10	-R	-PA
LS-LED H-Halogen	Lamp Heads on Unit	Series	DC Battery Voltage	Battery Type (S - Sealed) (N - Ni Cad)	Battery Amp/Hour	Head Shape -PH (Rect.) -R (Round)	Options

*Halogen Lamps not available with PH Heads.


RL (-PH)

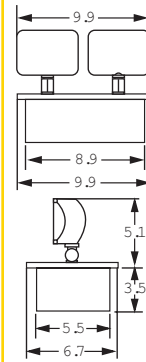

Rectangular Heads
Suffix "-PH"

Shown in Standard White Finish

RL (-R)

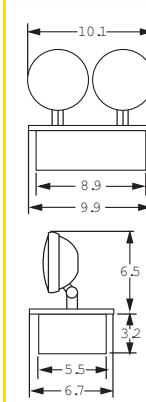

Round Heads
Suffix "-R"

Shown in Standard White Finish

The RL Series is ideal for installations requiring the aesthetic advantage of a fully recessed emergency unit.



Made in USA

Dimensions

RL Rough-In Opening
Size:
9" x 5 5/8"

Options

Add Suffix to Catalog Number

- BG Beige Finish
- BLK Black Finish
- OW Designer Off-White Finish (Round Heads Only)
- PA Plenum Construction
- SD Self Diagnostic (See page 72)
- ** Special Lamp Wattage (See page 63)

815.459.6143 11

www.bigbeam.com