

DESCRIPTION

The RME Series offers bright, even and highly reliable LED illumination with direction configurable “Running Man” diffuser legends. The housing is made of durable, powder coated 20 gage steel in white color. Designed for wall mount with universal KO pattern, or ceiling/end mount with canopy included.

APPLICATION

The RME Series can be applied to show the direction to the nearest exit by use of an arrow, or actual exit with no arrow as shown. The exit includes 2 each directional face-plates for easy conversion to double-face or 1 non-directional and 1 back-plate for wall mounting.

FEATURES

- Optional self-diagnostic/self-test feature to monitor proper operation
- Quick installation
- 120 through 347VAC, 50/60Hz.
- Includes long-life 4.8VDC Nickel Cadmium battery
- Full re-charge within 24 hours
- AC-on and test switch
- Fully automatic two-stage charger



tradeSELECT™

STANDARDS, CERTIFICATION, AND COMPLIANCES

Listed CSA 22.2 No. 141.10 standard for pictogram exit signs
CSA Certified for dry locations (10°C to 50°C)

WARRANTY

2 year full unit warranty

INPUT POWER REQUIREMENTS

	Input Watts (W)		Input Amps (A)	
	120VAC	347VAC	120VAC	347VAC
RMEUW	1.4	2.6	0.09	0.27
RMEUWE	1.2	2.2	0.06	0.19
RMEUWE-SD	1.9	3.6	0.09	0.27


Single Carton Weight: 6 lbs.

Master Carton Quantity: 12 each

ORDERING GUIDE

Catalog Number	Description
RMEUW	White Housing, AC only
RMEUWE	White Housing, NiCad Battery
RMEUWE-SD	White Housing, NiCad Battery, Self-Test/Self Diagnostic

DIMENSIONS

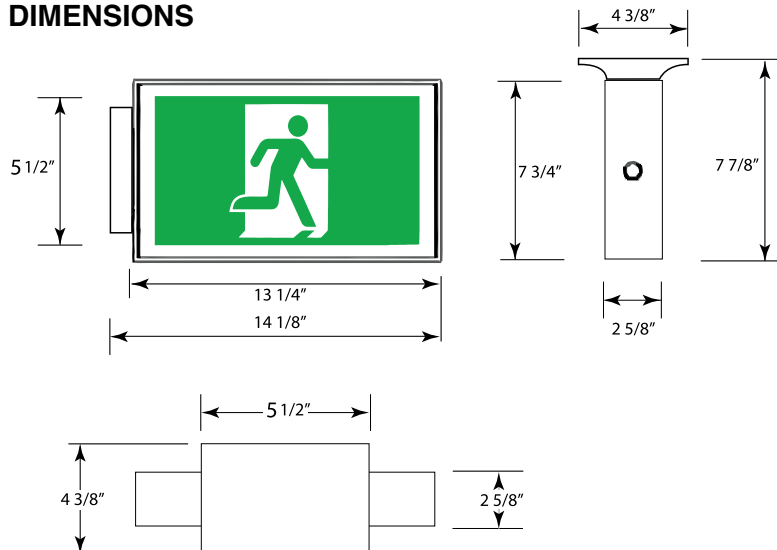

PANEL FACE OPTIONS

