

The Exitronix RSL Series combines LED performance and dependability with a compact, rugged 20 gauge steel enclosure. The corrosion resistant units feature fully adjustable LED lamp heads and easy installation. Most models have additional battery capacity for extended run time or powering remote lamps.

Model: _____ Date: _____
 Accessories: _____
 Job Name: _____ Type: _____


FEATURES & BENEFITS

- PAR18 thermoplastic LED lamp heads
- Enclosure constructed of rugged 20 gauge steel
- Available in 6V or 12V with capacities up to 90 watts
- Knockouts for side mounted heads
- Extended run time or remote capable
- Optional Guardian Self-test/Self-diagnostics (G2) available
- Buy American Act (BAA) compliant
- Compatible with [SR Series](#) LED remote lamp heads



SPECIFICATIONS

- Illumination:** Two top (standard) or side mounted, long-life, high intensity PAR18 5W or 7W LED lamp heads
- Housing:** Rugged 20 gauge steel with powder coated finish
- Input:** 120/277VAC Dual primary, 60Hz
- Battery:** Maintenance-free sealed lead calcium or NiCad battery available
- Operating Temp:** 10°C to 40°C (50°F to 104°F)
- Run Time:** CSA Listed 90 minute emergency run time, 24 hour recharge time
- Electrical:** Low voltage disconnect eliminates deep discharge, brownout, short circuit and voltage surge protection
- Mounting:** Shelf mount or universal mounting pattern with keyhole slots provided for wall mount
- Finishes:** Black or White
- Options:** G2 - Self-test/Self-diagnostics
 TD = Time Delay (10 minute)
- Certifications:** Conforms to UL 924 standards, Meets NFPA 101 Life Safety Code, NEC, OSHA
- Warranty:** Any component that fails due to a manufacturing defect is guaranteed for three years with a separate three year prorated warranty on the battery. The warranty does not cover physical damage, abuse or instances of uncontrollable natural forces. See the full Exitronix warranty document for detailed information and product registration instructions. (Terms and Conditions apply)

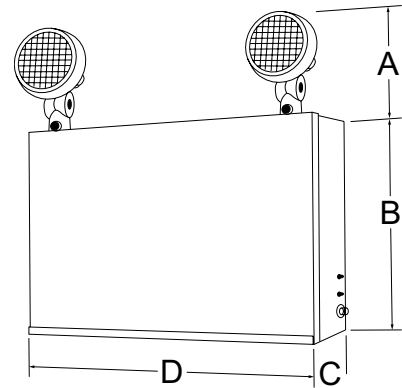

	12-60W	90W
A	5.9"	5.9"
B	4.0"	9.0"
C	2.0"	3.0"
D	12.0"	10.0"

ORDERING INFORMATION Example: RSL-6-12-0605-W-G2

Series	Battery	Wattage	Lamp Heads	Finish	Options (Factory Installed)
RSL	6 = 6 Volt Lead Calcium	6 Volt, Lead Calcium	0 = No Lamp Heads	B = Black	G2 = Self-test/Self-diagnostics
	12 = 12 Volt Lead Calcium	12 = 12 Watts	6 Volt PAR18 LED	W = White	TD = Time Delay (10 minute)
	6N = 6 Volt NiCad	18 = 18 Watts	0605 = (2) 5W Heads		
	12N = 12 Volt NiCad	27 = 27 Watts	12 Volt PAR18 LED		Accessories¹ (Field Installed)
		36 = 36 Watts	1205 = (2) 5W Heads		WG-S = Wire Guard (Back Mount)
		60 = 60 Watts	1207 = (2) 7W Heads		XG-PS = Poly Guard (Back Mount)
		12 Volt, Lead Calcium			SR1-0605-W = 6V, 5W LED Single PAR18 White Remote
		27 = 27 Watts			SR1-1205-W = 12V, 5W LED Single PAR18 White Remote
		36 = 36 Watts			SR1-1207-W = 12V, 7W LED Single PAR18 White Remote
		60 = 60 Watts			SR2-0605-W = 6V, 5W LED Double PAR18 White Remote
		6 Volt, NiCad			SR2-1205-W = 12V, 5W LED Double PAR18 White Remote
		22 = 22 Watts			SR2-1207-W = 12V, 7W LED Double PAR18 White Remote
		42 = 42 Watts			SR1-0605-B = 6V, 5W LED Single PAR18 Black Remote
		54 = 54 Watts			SR1-1205-B = 12V, 5W LED Single PAR18 Black Remote
		90 = 90 Watts			SR1-1207-B = 12V, 7W LED Single PAR18 Black Remote
		12 Volt, NiCad			SR2-0605-B = 6V, 5W LED Double PAR18 Black Remote
Notes		42 = 42 Watts			SR2-1205-B = 12V, 5W LED Double PAR18 Black Remote
¹ Order as separate line item		90 = 90 Watts			SR2-1207-B = 12V, 7W LED Double PAR18 Black Remote

CONSTRUCTION

The RSL series is die-formed 20 gauge steel housing with epoxy powder coat finish. White finish is standard. Black finish is optional. Universal J-box mounting pattern and keyhole slots provided for simple installation. Knockouts are provided on top, back, and sides for easy wire entry. Can also be shelf mounted – ordered separately. Lamp heads are constructed of high impact thermoplastic in a color matching the finish of the enclosure. Lamp heads feature a unique twist locking collar that securely holds the lens and facilitates quick and easy re-lamping.

ILLUMINATION

Fully adjustable, attractive PAR 18 5W or 7W LED lamp heads allow for maximum light to be delivered to the path of egress. Up to 4 lamp heads (limited by unit's total capacity) may be installed on each emergency unit.

ELECTRICAL

Input

Dual-voltage input 120 or 277VAC @ 60Hz. The RSL is configured with a high-efficiency two-stage charger providing precise float voltage control. All components used in the circuitry are temperature compensated. Charger status is easily determined via a dual diagnostic LED display.

Sealed Lead Calcium Battery

Exitronix sealed lead calcium batteries are maintenance-free.

Sealed Nickel Cadmium Battery – NiCad

Exitronix sealed nickel cadmium batteries are maintenance-free.

Emergency

The RSL Series exit will operate for a minimum of 90 minutes during a loss of power with a 24 hour maximum recharge time for the battery.

Brownout Circuit

The brownout circuit monitors the flow of AC current to the unit and triggers the emergency lighting system once a set reduction of AC power occurs. This dip in voltage will cause many fixtures to extinguish causing loss of normal lighting even though a total power failure has not occurred.

Low Voltage Disconnect

When the battery's terminal voltage falls below predetermined levels, a low voltage circuit disconnects the emergency lighting load. The disconnect remains in effect until normal power is restored, preventing deep battery discharge and improving the life of the battery. The disconnect will also automatically reconnect the load circuit once the battery voltage returns to a normal value after charging.

Test Button

The test button is easy to locate and provides manual verification of the transfer circuit and emergency lamps.

INSTALLATION

A universal mounting pattern and rear keyhole slots are provided for wall mounting. Stamped conduit knockouts are supplied standard. Terminal connectors allow for larger gauge wires to be connected for remote loads.

Assembled in the USA

Complies with Buy American provisions.

OPTIONS

Guardian Self-test/Self-diagnostics (Option: G2)

The Guardian circuit continuously monitors the operating condition of the AC power, battery supply voltage, emergency lamp continuity and charging circuit.

The purpose of this option is to provide visual signaling in response to a fault at the Emergency Unit and/or battery charger. The Guardian Self-Test/Self-Diagnostics system performs one 5 minute discharge test monthly. Every 6 months, two 90 minute discharge tests are performed. This tests both full battery capacity and recharge capability, as required by the Life Safety Code. The information is communicated simply and intuitively to maintenance personnel via a single multi-color LED.

Time Delay (Option: TD)


The purpose of this feature is to allow additional time (10 minutes) for "normally on" fixtures to return to full brightness prior to extinguishing the supplemental light from the emergency fixtures.

CONFORMANCE TO CODES & STANDARDS

The RSL Series conforms to UL 924 Standards and meets or exceeds the following: OSHA, NEC requirements and NFPA 101.


RSL 6V, 5W SAMPLE PHOTOMETRICS - 3' PATH OF EGRESS

Using multiple RSL 6V, 5W units mounted at a typical 7.5' height delivers 53' on-center spacing with a 3' wide path of egress using 80/50/20 reflectances.

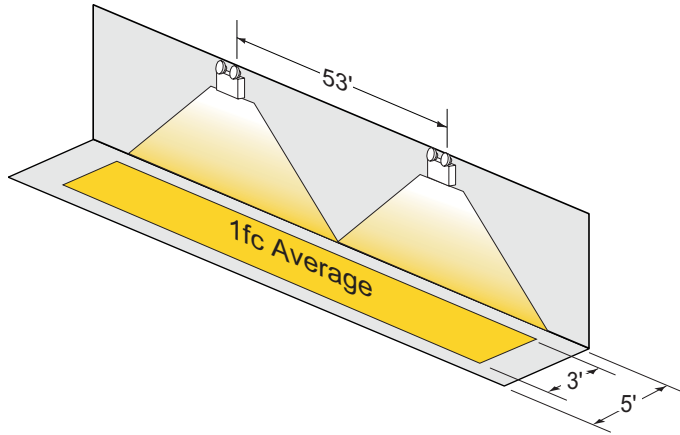


RSL 6V, 5W SAMPLE PHOTOMETRICS - 6' PATH OF EGRESS

Using multiple RSL 6V, 5W units mounted at a typical 7.5' height delivers 50' on-center spacing with a 6' wide path of egress using 80/50/20 reflectances.

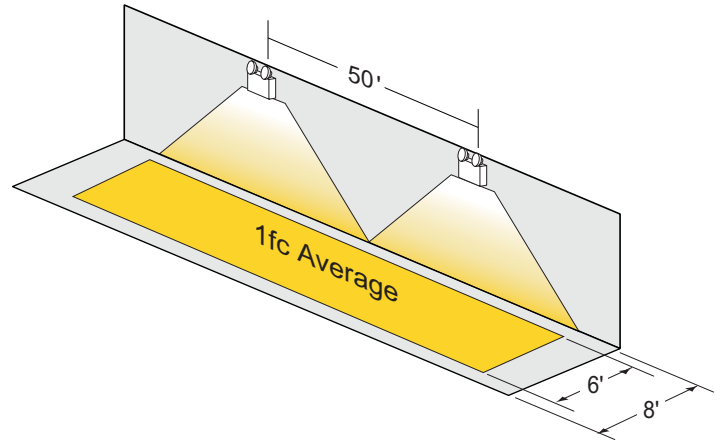


RSL 12V, 5W SAMPLE PHOTOMETRICS - 3' PATH OF EGRESS

Using multiple RSL 12V, 5W units mounted at a typical 7.5' height delivers 101' on-center spacing with a 3' wide path of egress using 80/50/20 reflectances.

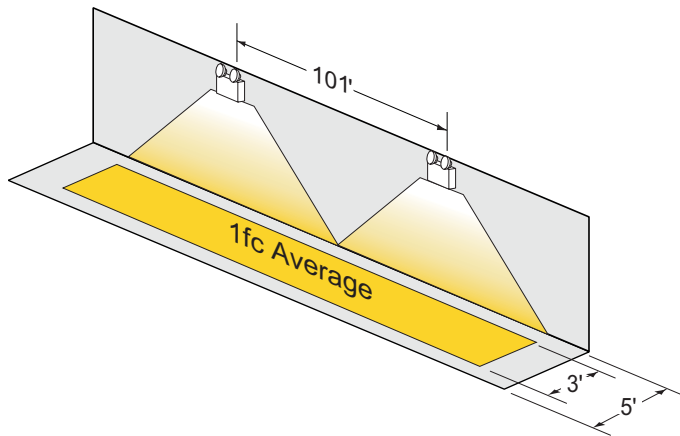


RSL 12V, 5W SAMPLE PHOTOMETRICS - 6' PATH OF EGRESS

Using multiple RSL 12V, 5W units mounted at a typical 7.5' height delivers 96' on-center spacing with a 6' wide path of egress using 80/50/20 reflectances.

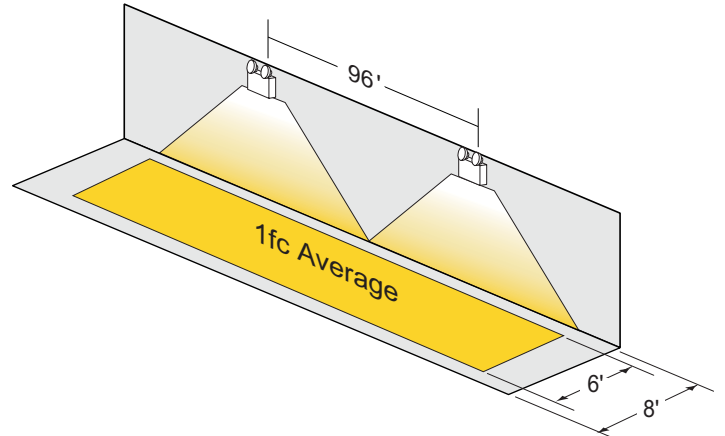

RSL 12V, 7W SAMPLE PHOTOMETRICS - 3' PATH OF EGRESS

Using multiple RSL 12V, 7W units mounted at a typical 7.5' height delivers 104' on-center spacing with a 3' wide path of egress using 80/50/20 reflectances.

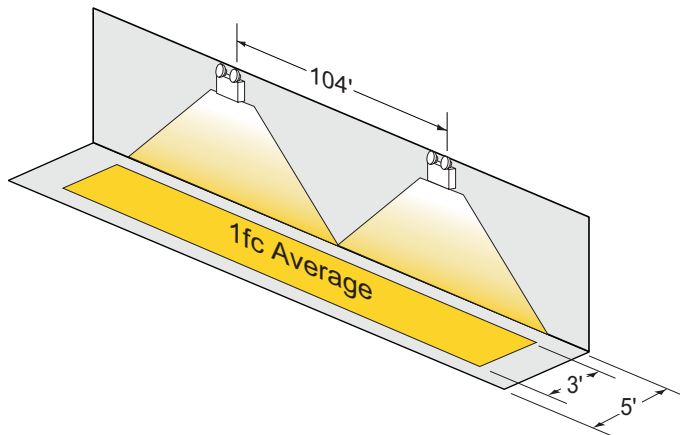

RSL 12V, 7W SAMPLE PHOTOMETRICS - 6' PATH OF EGRESS

Using multiple RSL 12V, 7W units mounted at a typical 7.5' height delivers 99' on-center spacing with a 6' wide path of egress using 80/50/20 reflectances.

