

## Remote Fixture Decorative™ Series

Contemporary and enduring style



### Description

- Indoor use
- Die cast aluminum construction

### Finish

Powder-coated off-white, black or brushed nickel

### Lamp type

Choice of MR16 LED lamp wattages

### Mounting

- Recessed Mount
- Must order appropriate housing with decorative head selection for installation into new construction ceiling (LU-GRHR03) or non-insulated ceiling (LU-GRHR05) GU10 or Insulated ceiling (LU-GRHR06)

### Approval

UL 924 Listed






### Warranty (subject to proper installation and maintenance)

Unit: three-year full warranty

Detailed warranty terms located on [page 197](#) or online at: [www.lightalarms.com](http://www.lightalarms.com)




### Series


	<b>RSTH18R:</b> concave (egress/ regress)	<b>Description:</b> Decorative lighting head
		<b>Dimensions:</b> 4.0" diameter base
	<b>RSTH19:</b> pop-out	<b>Color Suffix:</b> -WH = White or -BN = Brushed Nickel, -BK= Black
		<b>Description:</b> Decorative lighting head
	<b>LU-GRHR03</b>	<b>Dimensions:</b> 4.0" diameter base
		<b>Color Suffix:</b> -WH = White, -BK= Black
	<b>LU-GRHR05</b>	<b>Housing Enclosure Description:</b> New construction housing
		<b>Dimensions:</b> 5.6" x 14.24"
	<b>LU-GRHR06</b>	<b>Housing Enclosure Description:</b> New construction housing for GU10 (MR16 120V)
		<b>Dimensions:</b> 7.25" x 14.24"

### Photometric performance


Lamp	Spacing center-to-center (feet)	
	7 feet mounting height	15 feet mounting height
LD1	43'	36'
LD2	81'	64'
LD7	55'	43'
LD9	71'	56'
LD10	100'	85'
LD13	56'	44'
LD14	100'	85'
LD26	43'	39'

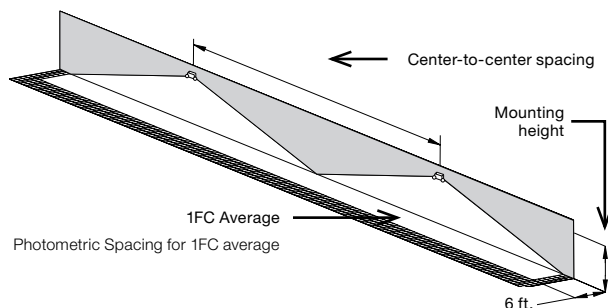


## Dimensions (Dimensions are approximate and subject to change)

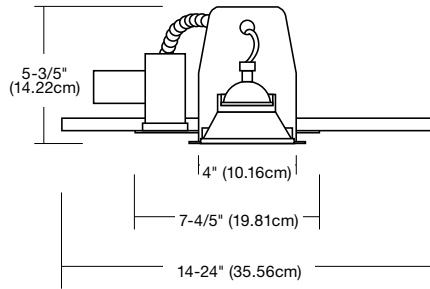

LU-GRHR03

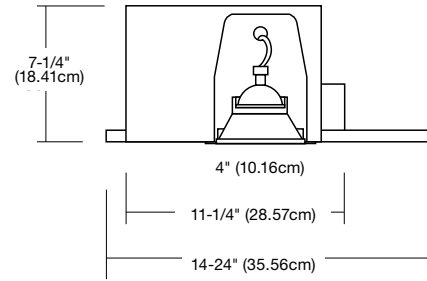

LU-GRHR06

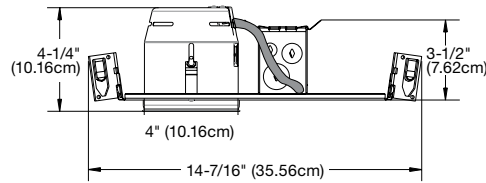

LU-GRHR05

## Lamp selection chart – MR16 LED lamps

Lamp suffix	Voltage	Wattage	Lumens	Replacement #
LD1	6	4	130	580.0097-L
LD2	6	5	415	580.0122-L
LD7	12	4	170	580.0093-L
LD9	12	5	340	580.0098-L
LD10	12	6	540	580.0106-L
LD13	24	4	200	580.0104-L
LD14	24	6	590	580.0100-L
LD26	120	4	200	580.0113-L

## Ordering format

Series	Lamp suffix	Color	Voltage
RSTH18R	/ _____ <sup>1</sup>	WH= White	6= 6 VDC
RSTH19		-BK= Black	12= 12 VDC
		-BN= Brushed nickel (available with RSTH18R only)	24= 24 VDC
			120= 120 VAC/VDC

**Example: RSTH18R/LD9-WH and LU-GRHR03**

With Housing Enclosure Example: LU-GRHR06 (for Insulated Ceiling installation)

<sup>1</sup> Choose from lamp selection chart