
FEATURES

- Die-cast aluminum housing with canopy
- Brushed aluminum face
- Dual voltage input 120/277 VAC, 60Hz
- Long-life, energy-efficient LEDs
- Premium sealed nickel cadmium batteries with 15-year life expectancy
- Universal, field-selectable chevrons
- Ceiling, wall and end mounting

ENERGY DATA

See Specification Sheet for Energy Data

Compliances may not apply to all product configurations. Please consult the product spec sheet for compliance details. **COMPLIANCES:** UL924 Listed; Damp Location, NYC Code Compliant

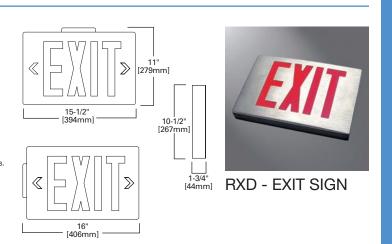

ORDERING INFORMATION

SAMPLE NUMBER: RXDN8R1

Family	Battery	Letter Size	Letter Color	Number of Faces
RXD=Rival Die-Cast Exit	N=Self-Powered	8 =8"	R =Red	1=One Face 2=Two Faces

Specifications and dimensions subject to change without notice. Consult your Cooper Lighting Solutions Representative or visit www.cooperlighting.com for available options, accessories and ordering information.

