

SPECIFICATION SHEET: SC-120-108-LT5

This Is An Original Product From Fulham Co., Inc

Description: PONY Series, High Frequency Electronic, Rapid Start Ballast,


* Meets Energy Star 4.0 Criteria For Applications Listed.


This Ballast Will Operate Following Lamps.



ELECTRICAL DATA

INPUT VOLT: 120V ± 10%, 50/60Hz									
LAMP WATTS/TYPE	F6T5	F8T5	F4T5	-	-	-	-	-	-
LAMPS OPERATED	1								
INPUT WATTS	7.01W	7.74W	5.01W						
LINE CURRENT:	0.121A	0.131A	0.089A						
POWER FACTOR	0.482	0.491	0.470						
BALLAST FACTOR	1.141	1.073	1.301						
EFFICACY FACTOR	16.278	13.862	25.961						
THD	166.2%	162.7%	175.0%						
CURRENT CREST FACTOR	1.609	1.532	1.914						
EMI/RFI COMPLIANCE	FCC PART 18-A (Consumer)								
SOUND RATING	"A"								
BALLAST TYPE	RAPID START								
VOLTAGE TRANSIENTS	ANSI 62.41								
INPUT/PROTECTION	FUSE								
OUTPUT/PROTECTION	NONE								
MIN. OPERATING TEMP	-10°C (14°F)								
MAX. CASE TEMP	75 [°] C (167 [°] F)								
ENERGY STAR 4.0									
APPROVALS/CLASS	UL /cUL LISTED, CLASS " P ", 1 OUTDOOR								

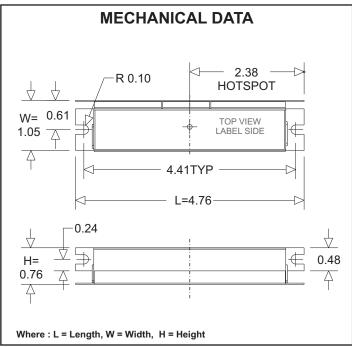

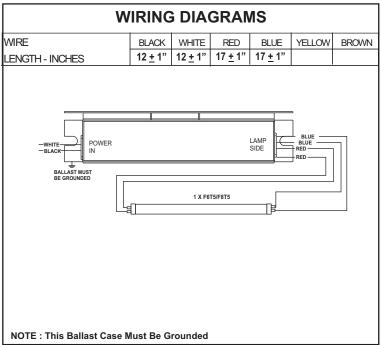

Fulham Co., Inc extends limited warranty only to the original purchaser or to the first user for the period of <u>2 years</u> from the date of manufacture as indicated by the date code stamped on each product and when properly installed and under normal conditions of use. For additional warranty guide line, please refer to our Complete Product Catalog OR <u>call Customer Service at 1-323-599-5000</u>.

DUE TO A PROGRAM OF CONTINUOUS IMPROVEMENT, FULHAM Co., INC RESERVES THE RIGHT TO MAKE ANY VARIATION IN DESIGN OR CONSTRUCTION TO THE EQUIPMENT DESCRIBED.