

Type No. _____
Job Name _____
Catalog No. _____



Shown: L3RU20S



Self-Luminous Series

➤ Tritium Exits

➤ 10, 15 or 20 Year Life

Housing

- Attractive ABS flame retardant housing
- Gray frame standard, black or white frame optional
- High impact polycarbonate face
- Easy Installation
- Ceiling, wall or flush mount
- Field selectable chevrons
- Suitable for wet, hazardous, explosive, humid, and other extreme environments
- Tamperproof and vandal resistant design

Warranty

- Choice of 10, 15 or 20 years
- 15 year maximum warranty on product supplied with IF1 and IF5

Illumination

- No external power source required
- Internal illumination of the sign face is accomplished with borosilicate glass sealed tubes internally coated with zinc sulfide phosphor and filled with tritium gas.
- Illumination level will exceed the .15 foot Lambert minimum for the entire service life
- Suitable for California low level applications
- No maintenance costs
- Lifetime of 10, 15 or 20 years

Code Compliance

- UL 924 listed
- NFPA 101, NEC, BOCA, OSHA, and IBC illumination standards
- Meets requirements of ICBO, SBCCI and NEC Article 500, Class I & II conditions

Application

- Hazardous location and general purpose areas where AC wiring is not readily available

Self-Luminous Series

Ordering Information

L3		U			
SERIES	FACE COLOR	ARROW	USEFUL LIFE	# OF FACES	OPTIONS
L3 Tritium Exit	R = Red G = Green	U = Universal	10 = 10 years 15 = 15 years 20 = 20 years	S = Single D = Double	AF = Aluminum Frame BK = Black Plastic Frame IF1 = Black Anodized Aluminum Vandal Resistant Frame ¹ IF5 = Brushed Aluminum Vandal Resistant Frame ¹ PW = Polycarbonate Lens ¹ WH = White Plastic Frame


NOTE: ¹ Available on single face exits only.

ACCESSORIES (Ordered Separately)
PKITTRB = 12" Pendant Kit, Black Plastic PKITTRG = 12" Pendant Kit, Gray Plastic PKITTRW = 12" Pendant Kit, White Plastic PKITTRAL = 12" Pendant Kit, Aluminum TPC-B = Mounting Canopy, Black TPC-G = Mounting Canopy, Gray TPC-W = Mounting Canopy, White TDRBRKT = Mounting Canopy, Single/Double Face, Aluminum

Ordering Example

Series _____ L3
 Face Color _____ R
 Universal Arrow _____ U
 Useful Life _____ 20
 # of Faces _____ S
 Options _____ PW

Dimensions

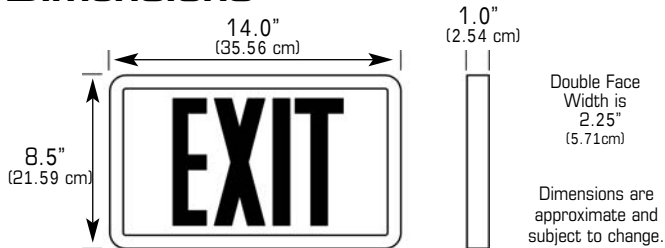

Suggested Specification

Furnish and install LightGuard Self Luminous Series Model _____. The exit shall be listed to Underwriter's Laboratories Inc. Standard #924 and shall meet the standards of the National Electrical Code (NEC). Internal illumination of the sign face shall be provided by borosilicate glass sealed tubes internally coated with zinc sulfide and filled with tritium gas. The exit shall have a _____ (10, 15 or 20) year life. The exit housing shall consist of a flame retardant gray (white or black optional) frame, and a high impact polycarbonate red or green face. The exit shall be easy to install and shall have field selectable chevrons.

ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



272 West Stag Park Service Road • Burgaw, NC 28425
 (910) 259-1131 • FAX (800) 403-6927
 www.lightguard.com

L2020R13
 5/09 IH