

# CHLORIDE

by 

## Exit/Emergency


SL Series

Self-luminous exit sign



Project: \_\_\_\_\_  
Location: \_\_\_\_\_  
Cat.No: \_\_\_\_\_  
Type: \_\_\_\_\_  
Lamps: \_\_\_\_\_ Qty: \_\_\_\_\_  
Notes: \_\_\_\_\_

### Example: SLR10SB

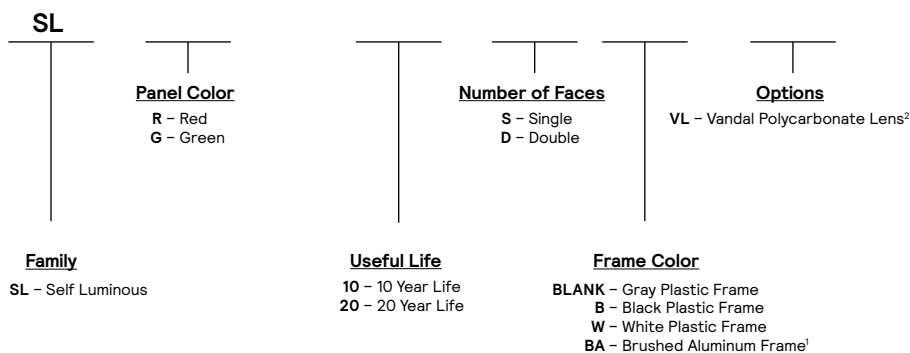

#### Note:

Canopy provided on all signs.

#### Accessories (order separately)

**WG4** - Wire Guard (Wall Mount Only)

**PM12W** - Pendant Mount with 12" white stem.\*

**PM12B** - Pendant Mount with 12" black stem.\*

**PM12G** - Pendant Mount with 12" gray stem.\*

\*Stem is also available in lengths of 24", 36" and 48". For a 24" stem, replace the 12 with 24 (Eg: PM24W).

#### Footnotes

<sup>1</sup>Not available with the (VL) Vandal Polycarbonate lens option.

<sup>2</sup>Not available on pendant mounted signs or signs with a (BA) brushed aluminum frame.

#### codes and standards

- UL listed to standard 924
- NFPA 101 (Life Safety Code)
- Meets BOCS, ICBO AND SBCCI requirements
- Suitable for California low level applications

#### construction

- Signs are provided with high impact Lexan polycarbonate lens between the frame and the faceplate.
- Exits are totally self contained and highly durable.
- Flame retardant, UV stabilized, injection molded ABS frame.
- Gray plastic frame is standard. White or black plastic frame is optional.
- Brushed aluminum frame is also optional.
- 6" letters with 3/4" stroke.

#### installation

- Easily installed in ceiling, wall or flush mount applications.
- Canopy for wall or ceiling mounting provided.

#### electronics

- Requires no electricity or external light source.
- Ideal for extreme temperatures, -67°F (-55°C) to 176°F (80°C).

#### lamps

- Exits are illuminated with a light source that consists of glass tubes internally coated with phosphor and filled with tritium gas, a natural isotope of hydrogen.

#### battery

- Exits are completely free of any external energy source providing 10 or 20 years of continuous illumination, maintenance free operation and code compliant.

#### warranty


- 10 or 20 year warranty based on useful life of exit chosen.




# SL Self-luminous exit sign

## dimensions


Plastic Frame Single Face

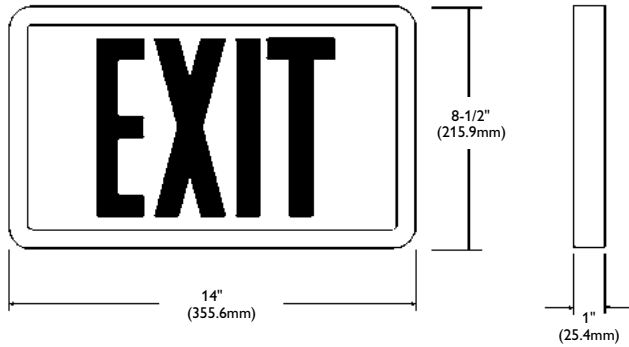

Plastic Frame Double Face

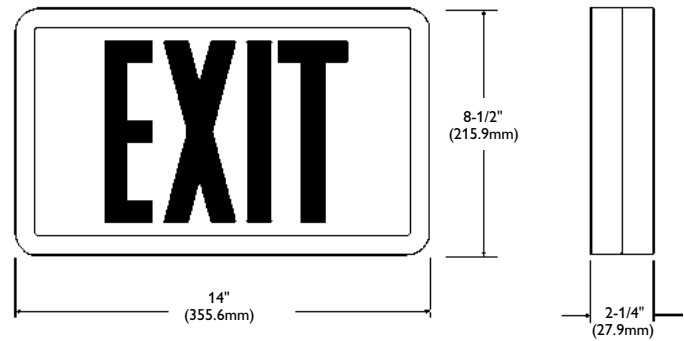

Aluminum Frame Single Face

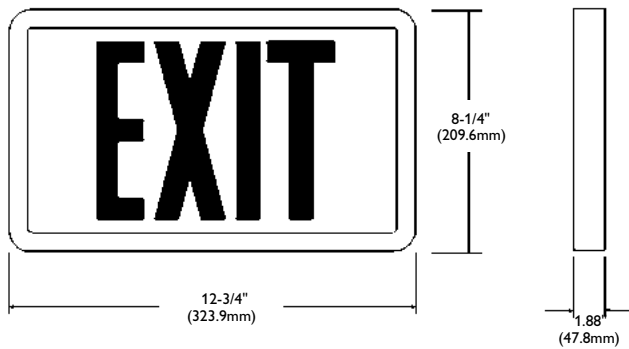

Aluminum Frame Double Face

