

SRP - PAR18

Small Style Emergency Remote

INDOOR



Remotes

Job/Location: _____
Contractor: _____
Prepared By: _____

Job Type: _____
Date: _____



■ SRP - small style emergency remote

The **SRP** SERIES of remotes are constructed of high impact thermoplastic and feature an innovative rotary locking collar design that securely locks the lens and reflector assembly into place. The locking collar allows maintenance personnel to quickly and easily complete relamping. A tool-less mechanically adjustable swivel locks the head in position once adjusted. The matching canopy fits all standard electrical junction boxes. The **SRP** is supplied standard in a white, black is optional. The operating temperature is from -22°F up to 104°F (-30°C to 40°C).

■ ordering information


Series	Head #	Voltage / Wattage	Options
SRP	1 (Single head)	See lamp selection	LC (Less canopy)
	2 (Double head)		B (Black housing)
	3 (Triple head)		
	4 (Quad head)		

■ lamp selection


	6V	12V	24V
Incandescent	5.4, 7.2, 9, 12W	9, 12, 18W	9, 18W
Halogen (H)	12, 20W	12, 20W	12, 20W
MR16	10W	12W	N/A
MR16 LED	5W	2, 5, 7W	5, 7W

■ dimensions (in,mm)


SRP1

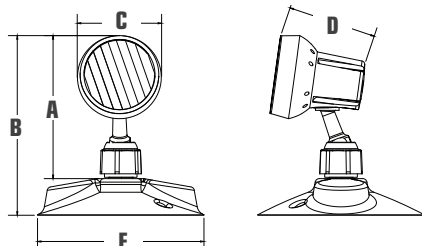

SRP2

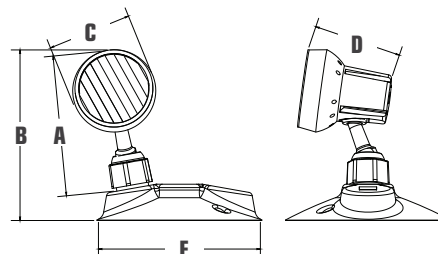

SRP3/4

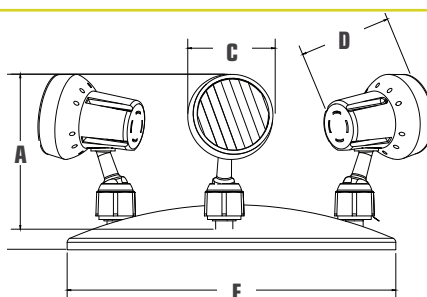

MODEL	A	B	C	D	E
SRP1	4 ¹ / ₄ " (108mm)	5 ³ / ₈ " (136mm)	2 ³ / ₄ " (70mm)	2 ⁷ / ₈ " (72mm)	5" (127mm)
SRP2	4 ¹ / ₄ " (108mm)	5 ¹ / ₈ " (130mm)	2 ³ / ₄ " (70mm)	2 ⁷ / ₈ " (72mm)	5" (127mm)
SRP3	4 ¹ / ₄ " (108mm)	5 ¹ / ₈ " (130mm)	2 ³ / ₄ " (70mm)	2 ⁷ / ₈ " (72mm)	9 ¹ / ₂ " (241mm)
SRP4	4 ¹ / ₄ " (108mm)	5 ¹ / ₈ " (130mm)	2 ³ / ₄ " (70mm)	2 ⁷ / ₈ " (72mm)	9 ¹ / ₂ " (241mm)