



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

## SPECIFICATIONS

### FEATURES

- Architectural-grade edgelit exit designed for upscale applications
- Optional gold or silver plating
- Choice of mounting: ceiling, wall, or end

### CONSTRUCTION

- Rigid galvanized steel back box with a machined and hand crafted solid alloy trim
- CAD-24 caddy bars are included to ease installation in drop in ceilings
- Panel face is tempered glass or acrylic
- Field-selectable chevron directional indicator offers a choice of direction on-site
- EXIT letters are 6" tall with 3/4" stroke; 100 ft viewing distance
- Custom signage is available (consult factory.)

### LAMP

- AllnGaP LEDs with a rated life of 10+ years

### ELECTRONICS

- Dual-voltage input capability: 120/277V
- Low-voltage disconnect
- AC indicator light with test switch
- Brownout protection

### BATTERY

- EM option comes standard with nickel-cadmium battery
- Provides a minimum of 90 minutes of illumination upon loss of power

### COMPLIANCE

- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards

### WARRANTY


- 5-year warranty on housing and electronics. Battery is prorated

## TIFF

ARCHITECTURAL GRADE EDGELIT EXIT SIGN



## DIMENSIONS

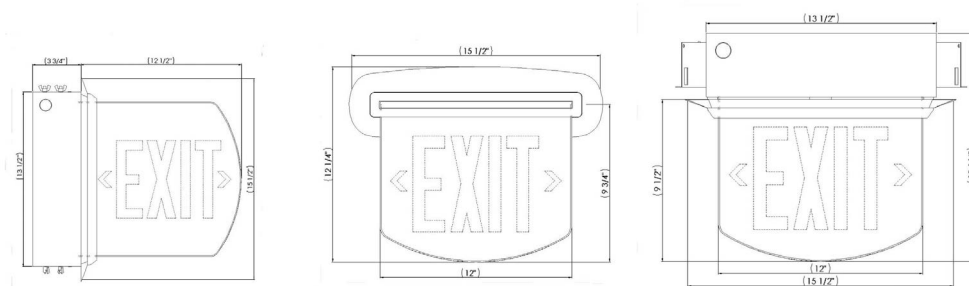

Material	Recessed Mounting	Battery	Code Compliance
Special Plated Alloy	Wall / Ceiling / End	Nickel Cadmium	UL 924

## ORDERING GUIDE

MODEL	MOUNTING	TRIM FINISH	NO. OF FACES	CHEVRON DIRECTION	BACKGROUND COLOR	POWER CONFIGURATION
TIFF	C Ceiling W Wall E End	SI Silver GO Gold SN Satin Nickel BZ Bronze AB Antique Brass	1 Single 2 Double	NC None AR Arrow Right AL Arrow Left AD Arrow Left & Right	C <sup>1</sup> Clear M Mirror	AC AC Only EM Emergency

### Notes:

1. Single face only