



TJTUNV015ARxxxB

DirectAC UNV Retrofit Kit Engines

- Integrated AC Direct Drive (No DC Driver)
- Universal Voltage (120~277) AC Engine
- Suitable for open or fully enclosed luminaires
- Suitable for luminaires with plastic and glass lenses
- All 90CRI product meets CEC Title 24 requirement
- cULus Classified 1598C
- cULus Recognized 8750
- Energy Star Luminaire 2.0 Listed (for rebate programs) ^①
- Energy Star Luminaire CSD ^①

General Specifications

Input Voltage / Frequency ^②	120~277VAC (+/- 10%) / 50-60Hertz		
Input Current ^②	~0.125A @120V	~0.066A @230V	~0.055A @277V
Input Power ^②	15W (+/- 1W)		
Input PF	>0.98		
THD	<20%		
Operating Frequency	120Hz		
Max Lumen Output @ Full Power ^②	1725 lumens @ 4000K / 80 CRI		
Dimming Type/Range @120V ONLY	Leading Edge (TRIAC) or Trailing Edge (ELV) /100% ~ 10%		
Beam Angle	120°		
CRI	80 (standard), 90 available (MTO)		
Operating Temperature Range (Ta)	-35 to 50°C / -31°F to 122°F		
Maximum Engine Case Temperature	L70: Tc max=80°C (Ts=85°C) / L90: Tc max=80°C (Ts=85°C)		
Maximum Lens Temperature	Lens: 90°C / 194°F		
Estimated Lumen Maintenance (at Max Tc)	L70= >54,000 hours / L90= 17,000 hours		
Color Consistency	Binning per ANSI C78.377-2015 @25°C; 3 SDCM		
Overall Size	7.4" L x 4" W x 0.71" H		
Wire Type/ Length	18AWG / 12" Black and White wires		
LED Quantity	48 Pcs.		
Weight	130g / 0.28lbs.		
Packaging: Carton / Master Carton	24pcs / 96pcs		
Maximum Screw Installation Torque	60in-lb (960in-ozf)		
Safety/Compliance	DirectAC Engines: cURus (File # E486778) TATUNV015ARxxxA DirectAC Retrofit Kits: cULus (File # E486779) TJTUNV015ARxxxB RoHS Compliant Dry and Damp Location IC Over Temperature Control Energy Star Luminaire 2.0 Listed ^① Energy Star Luminaire CSD ^①		
RFI/EMI	FCC Part 15B Consumer, EN55015		
Input Surge Test	2.5kV Common and Differential mode (Per ES Ring Wave Test)		
Sound Rating / Noise	A / <24 dBA		
Percent Flicker / Flicker Index	<25% / <0.0527		
Protective Lens / Enclosure	High Voltage Barrier / 2.5mm Clear Polycarbonate 5VA Flame rated		
Lens Transmittance	>92%		
PCB Material	MCPCB		
Warranty	5 years @ Max. Tc from the date of manufacture		
Electrolytic Capacitor Rating	>60,000 hours		

^① See page #4 "Certification Chart" for exact models.

^② Measured electrical data per UL file



TJTUNV015ARxxxB

Part Number Matrix

T J T UNV015 A R 8 40 B

① Engine Type: J= DirectAC Engine Retrofit Kit (Classified)
 Dimming: T = TRIAC/ELV
 Input Voltage: UNV = 120V~277V
 Input Power: 015 = 15W
 Material: A=MCPCB+wire
 Shape: R=Rectangular
 CRI: ② 8 = 80, 9 = 90
 Color Temperature: ② 27 = 2700K, 30 = 3000K, 35 = 3500K, 40 = 4000K, 50 = 5000K
 Option: ③ B = DirectAC Engine +Lens (Retrofit Kit)

Electrical and Optical Specifications

Color Temperature	DirectAC Engine Part Number	Input Power	Nominal Luminous Flux @ 90 CRI	Engine Efficacy @ 90 CRI	Nominal Luminous Flux @ 80 CRI	Engine Efficacy @ 80 CRI
2700K	TJTUNV015ARx27B	15W	1340 lumens	89 lm/W	1550 lumens	103 lm/W
3000K	TJTUNV015ARx30B	15W	1405 lumens	94 lm/W	1630 lumens	109 lm/W
3500K	TJTUNV015ARx35B	15W	1405 lumens	94 lm/W	1630 lumens	109 lm/W
4000K	TJTUNV015ARx40B	15W	1485 lumens	99 lm/W	1725 lumens	115 lm/W
5000K	TJTUNV015ARx50B	15W	1485 lumens	99 lm/W	1725 lumens	115 lm/W

Luminous Flux De-Rating: CCT and CRI Multipliers

CCT \ CRI	2700K	3000K	3500K	4000K	5000K
80(R9>0)	0.90	0.94	0.94	1.00	1.00
90(R9>50)	0.78	0.81	0.81	0.86	0.86

NOTES:

- 1) DirectAC Engines standard model "B" comes with engine and lens.
- 2) Nominal luminous flux includes a 7.5% loss due to lens. Use a 1.075 multiplier when lens is removed.
- 3) Electrical and optical specifications are based on Tc mod = 25°C. Reference Amb. Temp. vs Rel. Lum. Flux for other temperatures.
- 4) Specifications are subject to change without notice.
- 5) All 90CRI product meets CEC Title 24 requirement.

③ Standard Product offering, in addition to 90CRI / 3000K (All other options are made to order with MOQ and lead time).

④ LED Engine Retrofit Kit includes mounting hardware, retrofit labels, and installation instructions.




TJTUNV015ARxxxB

Thermal Specifications

⑤ DirectAC Engine Retrofit Kit (B)

Storage Temperature Range	-35°C(-31°F) to 100°C(212°F)
Operating Ambient Temperature Range	-35°C(-31°F) to 50°C(122°F)
Maximum Engine Case Temperature (Tc)	L70: Tc max=80°C (Ts=85°C) / L90: Tc max=80°C (Ts=85°C)
Maximum Lens Temperature	90°C (194°F)



Tc located on module

Thermal De-Rating: Tc vs. Luminous Flux

Module Case Temperature (Tc)	Luminous Flux Multiplier
25°C	1.000
30°C	1.000
35°C	0.991
40°C	0.972
45°C	0.963
50°C	0.953
55°C	0.944
60°C	0.935
65°C	0.925
70°C	0.916
75°C	0.897
80°C	0.888
85°C	0.879
90°C	0.869
95°C	0.850
100°C	0.841

NOTES:

- 1) Refer to LED Engine Retrofit Kit Installation Instructions for further detail.
- 2) This LED Engine Kit can retrofit any luminaire with a dimension/volume greater or equal to the minimum dimensions shown below and on the Installation Instructions.
- 3) This LED Engine Kit can be used with luminaires similar to the one illustrated on the Installation Instructions.

⑤ Suitable for surface mounted luminaire with minimum dimensions or volume: 10.5" L x 4.25" W x 6" H or 158.66 cubic inches



Certification Chart

Model	TJTUNV015ARxxxB
Classification	
RoHS COMPLIANT	YES
UL US	TJTUNV015ARxxxA
CLASSIFIED UL US	TJTUNV015ARxxxB
ENERGY STAR Listed	YES (80/90CRI)
ENERGY STAR CSD	YES (80/90CRI)


Energy Star™ TM-21 Calculator Data

Tc Module	Reported L70	Reported L90
50°C	>54,000 Hrs	>17,000 Hrs
80°C	>54,000 Hrs	17,000 Hrs
100°C	37,000 Hrs	11,000 Hrs

Tc Module	Calculated L70	Calculated L90
50°C	>55,000 Hrs	>17,000 Hrs
80°C	55,000 Hrs	17,000 Hrs
100°C	37,000 Hrs	11,000 Hrs

Product Image: 15W Rectangular AC Engine Kit

TJTUNV015ARxxxB

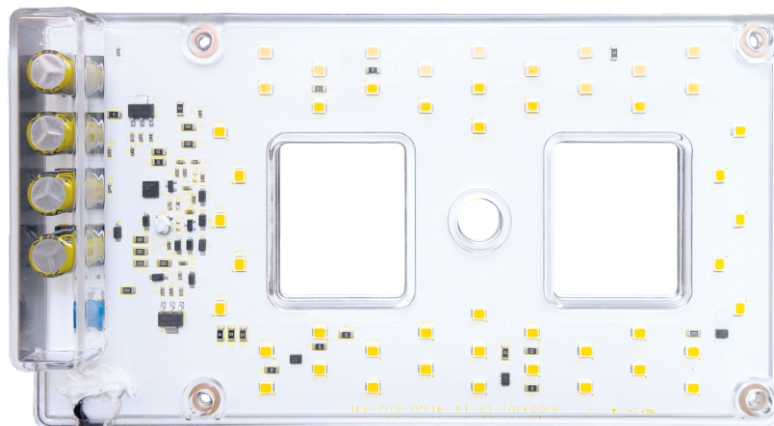

CAUTION: THIS LUMINAIRE HAS BEEN MODIFIED TO OPERATE LED LAMPS. DO NOT ATTEMPT TO INSTALL OR OPERATE FLUORESCENT LAMPS IN THIS LUMINAIRE.

NOTICE - THIS LUMINAIRE HAS BEEN MODIFIED AND CAN NO LONGER OPERATE THE ORIGINALLY INTENDED LAMP. (WITH RESPECT TO FIRE AND SHOCK ONLY) FOR USE ONLY WITH PRODUCTS DESCRIBED AND INSTALLED IN ACCORDANCE WITH THE INSTRUCTION PROVIDED WITH THIS RETROFIT KIT.



NOTES:

DirectAC UNV Retrofit Kit Engines:
Hardware, Labels & Installation Instructions

1) Energy Star CSD:
https://www.energystar.gov/products/lighting_fans/certified_lighting_subcomponent_database_csd


2) Energy Star Listed:
https://www.energystar.gov/productfinder/product/certified-light-fixtures/results?scrollTo=342&search_text=fulham&fixture_type_isopen=&markets_filter=United+States&zip_code_filter=&product_types=Select+a+Product+Category&sort_by=light_output_lumens&sort_direction=asc&page_number=0&lastpage=0

Installation Instructions




Mechanical Drawings

(Scale 13 : 20)

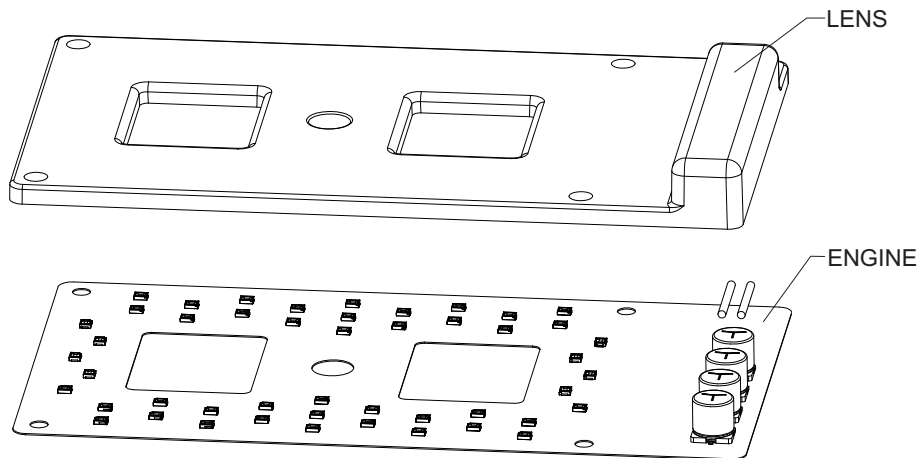


Exploded View

Overall Dimensions	
Length	7.4" [187.96mm]
Height	0.71" [18.03mm]
Width	4" [101.6mm]
Wire Length AC Input (Black / White)	12" [304.8mm]

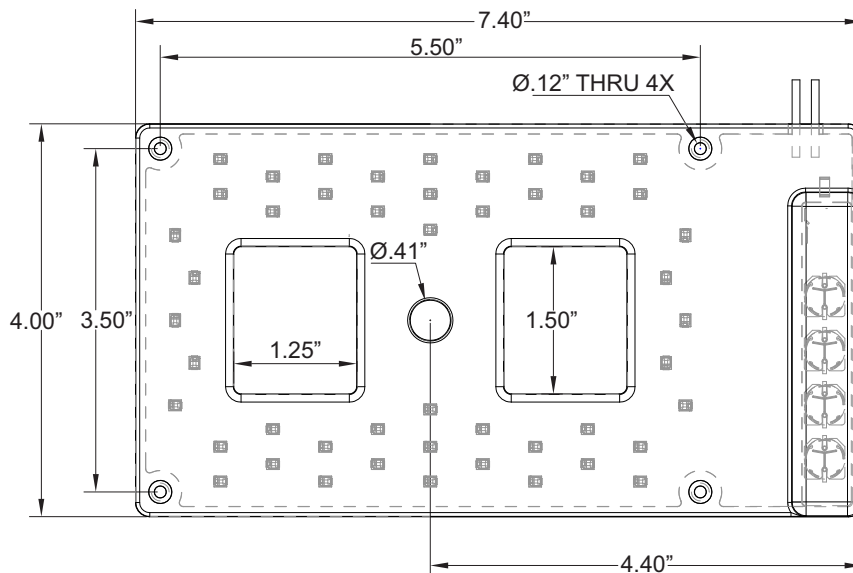

Top View



Side View




TJTUNV015ARxxxB

Accessories

VLE-OPT-120-003 (Diffused Lens)

- High Voltage Barrier
- 3mm Diffused Polycarbonate 5VA Flame rated.
- Lens Transmittance >75%
- Lens Sold Separately

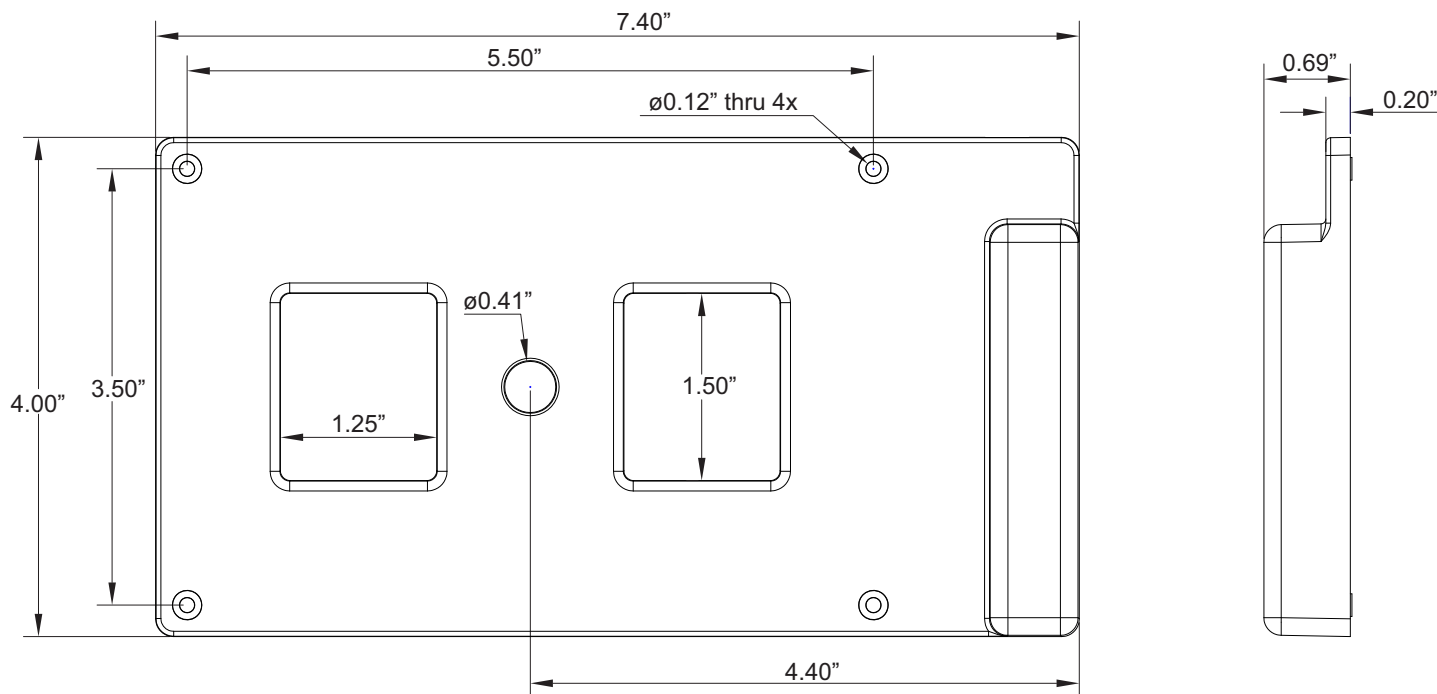



TJTUNV015ARxxxB

Guidelines

Reduced Flicker Operation Feature

- DirectAC Engine models have added circuitry to help reduce the Flicker when operated on the 50/60Hz power lines. The Flicker percentage on these models is below 30% when operated at line voltage, per CEC requirement. Dimming by line voltage devices may increase the Flicker percentage as the power levels are reduced.

Hi-Pot Testing (Caution)

- All DirectAC Engine models are Hi-Pot tested on the Fulham production line. We advise NOT to apply AC Hi-voltage Dielectric test to LED products as this may damage the sensitive electronic components as well as the LEDs. Please inspect the connection wires for any nicks or cuts in the insulation during and after installation.

Termination Notes

- A luminaire disconnect UL listed connector is included, as part of Fulham's retrofit kit only, to meet Energy Star requirements.
 - Use solid wire size 18AWG/12" per pole, rated at max 600V load and 105°C operating temperature.
 - Strip wires to 11-13mm (0.47in.).
 - Connector not for multiple use.
- For additional information on Wago's 873 Series Lumi-Nuts® connector, please visit:



Environmental Rating

- DirectAC Engines are rated for dry and damp locations.

IC Over Temperature Control

- DirectAC Engine models have built in Thermal management, if the unit experiences higher than normal ambient temperatures the circuit by design will reduce the drive current to the LED there by reducing the thermal impact on the LED's.

Fastening to Luminaire

- When installing by "mounting thru holes" (recommended), use any screw with diameter less than 0.13in. [3.4mm]. Mount on a flat surface and use all 4 mounting holes to ensure good contact between back side of Engine and mounting surface. Refer to max specified torque for installation. Suggested screw sizes: #5 or M3 Pan/Flat Head screw. Fulham provides four 6-20 X 5/8" Flat Head Self Drilling Screws, see instruction sheets for further details.

Electrostatic Sensitive Product (ESD)

- Fulham LED products should be handled with proper measures to protect against any potential ESD damage.
- When servicing, personnel should be ground and direct contact with LED should be avoided.

Thermal Management


- Proper thermal management should be employed to ensure life and reliability of product.

Wiring


- Intended for 120~277V application ONLY.
- Connect the Black wire from the DirectAC Engine to the building Line by using the proper connectors or wire nuts.
- Connect the White wire from the DirectAC Engine to the building/source Neutral by using the proper connectors or wire nuts.
- DirectAC Engine does not need grounding, but the luminaire must be grounded.



Color and Binning

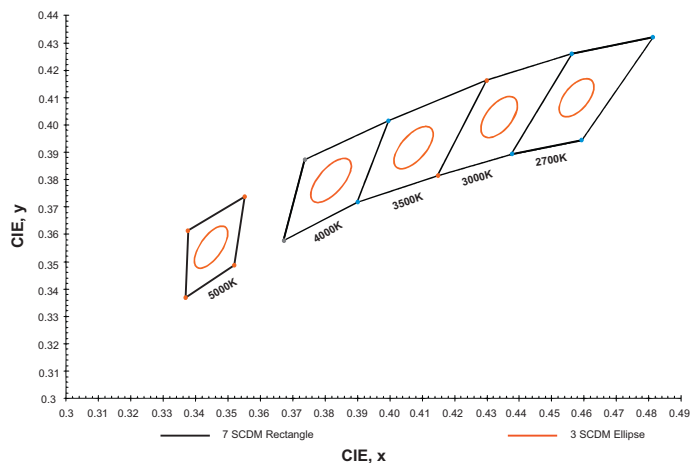

Optical Spectrum

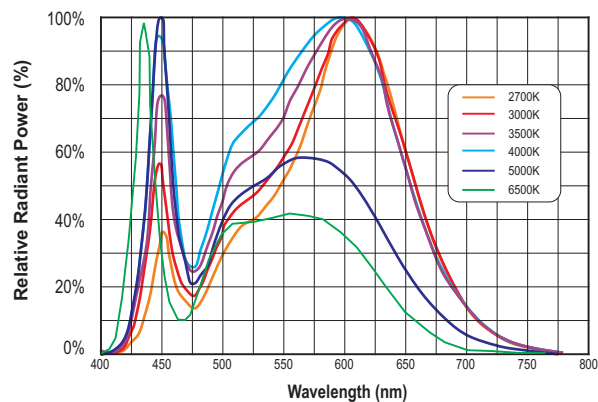

NOTES:

- 1) The Color and Binning and Optical Spectrum charts are for reference only. For more detailed info, contact factory.
- 2) Reference Bridgelux Chromaticity Diagram for Color and Binning. Binning per ANSI C78.377-2015 @ 25°C; 3 SDCM.
- 3) The Optical Spectrum values vary depending on product type and color rank.



TJTUNV015ARxxxB

Compatible Tested Dimmers

(Contact Fulham for other alternatives)

(TRIAC or ELV Dimmers)

Manufacture	Model	Type
Core	SI061BR-PTA	TRIAC (Leading Edge) Incandescent Analog
Legrand	RH703PTC	TRIAC (Leading Edge) Incandescent Analog
Leviton	002-6633-PLW	TRIAC (Leading Edge) Incandescent Analog
Leviton	DDE06-BLZ	ELV (Trailing Edge)
Leviton	R70-6631-1LW	TRIAC (Leading Edge) Incandescent Analog
Leviton	RDL06-10Z	TRIAC (Leading Edge)
Lutron	CT-600P	TRIAC (Leading Edge)
Lutron	DV-600P	TRIAC (Leading Edge)
Lutron	LG-600P	TRIAC (Leading Edge)
Lutron	D-600R	TRIAC (Leading Edge) Incandescent Analog
Lutron	SELV-303P	ELV (Trailing Edge)
Lutron	S-600	TRIAC (Leading Edge)
Lutron	S-603P	TRIAC (Leading Edge) Incandescent Analog



TJTUNV015ARxxxB

DirectAC Engine Equivalency Chart

DirectAC Engine/Kit (15W)				CFL					
Engine/Kit Part Number	System Wattage	Lumen Output	Efficacy	CFL Style	Lamp Wattage	# of Lamps	Total Wattage	Lumen Output	Efficacy
TJTUNV015AR8xxB	15W	1725 lm (4K/80CRI)	115 lm/W	Quad	13W	2	26W	1550 lm	59 lm/W
					18W	1	18W	1075 lm	
					26W	1	26W	1550 lm	
				Triple	13W	2	26W	1650 lm	63 lm/W
					18W	1	18W	1020 lm	56 lm/W
					26W	1	26W	1536 lm	59 lm/W
				Circline T9	22W	1	22W	775 lm	35 lm/W
				Circline T5	22W	1	22W	1530 lm	69 lm/W

NOTES:

- 1) For reference only, several factors apply.
- 2) Emergency systems are not UL classified for field installation.



TJTUNV015ARxxxB

Flicker Test Data Summary

(Test performed by third party lab using, Lutron S-600P dimmer)

With Dimmer at 100%

100% Light Output Percent Amplitude Modulation					
No Filter	40 Hz	90 Hz	200 Hz	400 Hz	1000 Hz
21.04%	0.71%	2.00%	17.56%	18.24%	19.87%
Measurement Period:		2.000 sec	Noise:		18.6 dBA
Recording Interval:		4.00E-05 sec	Fraction of rated light output:		100%
Flicker Index:		0.0527			

With Dimmer at 20%

20% Light Output Percent Amplitude Modulation					
No Filter	40 Hz	90 Hz	200 Hz	400 Hz	1000 Hz
19.45%	1.04%	2.27%	12.86%	15.80%	17.08%
Measurement Period:		2.000 sec	Noise:		18.3 dBA
Recording Interval:		4.00E-05 sec	Fraction of rated light output:		21%
Flicker Index:		0.0406			


With Dimmer at Minimum Light Output

Minimum Light Output Percent Amplitude Modulation					
No Filter	40 Hz	90 Hz	200 Hz	400 Hz	1000 Hz
25.00%	0.73%	1.30%	9.00%	11.42%	12.26%
Measurement Period:		2.000 sec		Noise: 18.3 dBA	
Recording Interval:		4.00E-05 sec		Fraction of rated light output: 10%	
Flicker Index:		0.0289			



Packaging


Carton



Twenty-Four (24) LED AC Engine retrofit kits inside each carton.

OUTER DIMENSION		
L	W	H
15.55" (395mm)	12.99" (330mm)	6.30" (160mm)
Net Weight	Gross Weight	QUANTITY
7.28 lbs. (3.30kg)	8.16 lbs. (3.70kg)	24pc.

Master Carton

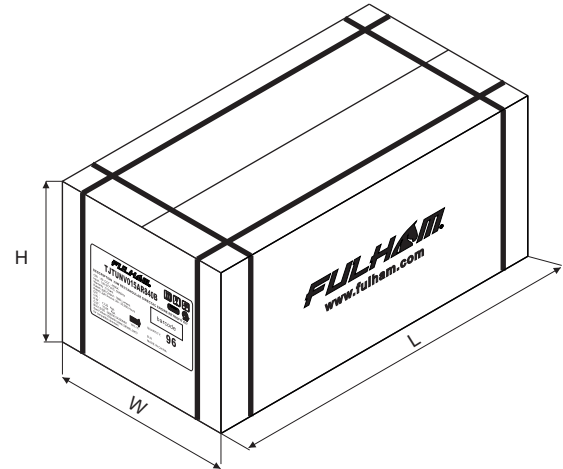

Four (4) cartons inside each Master Carton.

OUTER DIMENSION		
L	W	H
26.77" (680mm)	16.33" (415mm)	13.78" (350mm)
Net Weight	Gross Weight	QUANTITY
29.10 lbs. (13.20kg)	34.83 lbs. (15.80kg)	96pcs.