

DESCRIPTION

The TPX series is an extremely thin profile die cast Exit for architectural applications. The aluminum housing is available in standard brushed aluminum face with a black housing, all black or all white. Long life, no maintenance red or green LED's provide a uniform appearance with field configurable chevrons. A long life nickel cadmium battery reduces maintenance and powers the sign for a minimum of 90 minutes.

Catalog #		Type
Project		
Comments		Date
Prepared by		

SPECIFICATION FEATURES

Electrical

- Voltage Input 120/277 VAC
- AC only or self powered (battery back up) versions
- Internal transfer switch automatically connects to battery during a power outage
- 90 minute run time for self powered
- 2.4 volt long life nickel cadmium battery
- Test switch / power indicator light to meet code compliance
- Battery fully recharges in 24 Hours

Housing Construction

- Specification grade, low profile aluminum die cast design
- Die cast aluminum housing available in white, black or brushed aluminum
- Universal knock out pattern on back plate for wall mount
- Aluminum mounting bracket included for top or end mount
- NFPA 101 compliant field configurable chevrons
- Available in single or double sided configurations

Code Compliance

- UL 924, damp location Listed
- Temperature rated for 0 C to 50 C (-32F to 122F)
- Life Safety NFPA 10, NEC, OSHA
- Most State and Local Codes
- Suitable for floor proximity installation

Lamp Data

- Long life LED lamps provides uniform light output
- Red or green lettering


Warranty

- Exit: 5-year
- Battery: 7-year pro-rated



TPX SERIES

THIN PROFILE EXITS
SELF POWERED EMERGENCY
DIE CAST HOUSING
LED LAMPS
EXIT LIGHTING

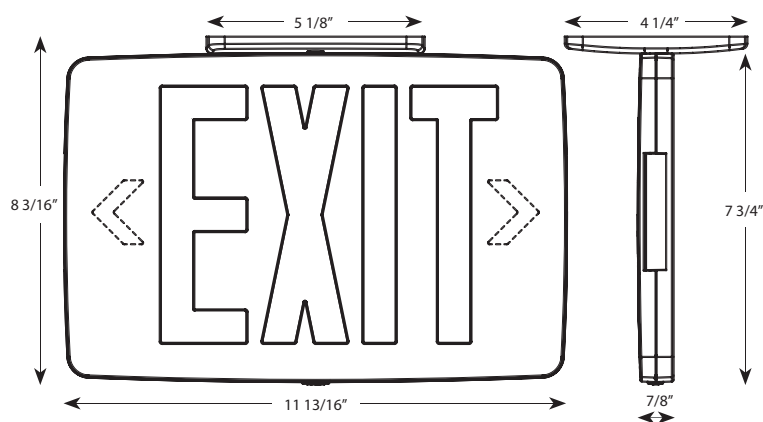

ORDERING INFORMATION

SAMPLE NUMBER: TPX72RBK

Series	Battery	Number of Faces	Exit Letter Color	Housing Color
TPX	6=AC only 7=With battery	1=Single face 2=Double face	R=Red G=Green	_=Brushed aluminum BK=Black WH=White

ENERGY DATA

	120 V	277 V
Input Power	1.0W	1.0W
Current	0.1A	0.1A