

## UX4 LED Steel Exit and Combination Series

Steel LED exit signs and combination units



### Construction

- Steel housing
- Standard mist-white finish, optional black finish
- Heads available in thermoplastic
- 6 inch EXIT lettering legend, available in red or green
- Field-selectable chevrons

### Mounting

- Surface mount
- Canopy included for end or ceiling mount applications
- Universal J-Box mounting

### Combo units

- UX4E Model, Lead-calcium battery, 6V-30W total battery capacity
- UX4EN Model, Nickel-Cadmium battery, 6V-24W total battery capacity

### Exit sign

- UX4 Model, Exit Sign, AC-Only, 120/277VAC, 50/60Hz
- UX4N Model, Nickel-Cadmium battery

### Photometric performance

Lamp	Spacing center-to-center (feet)	
	7 feet mounting height	15 feet mounting height
LD1	43'	36'
LD2	81'	64'

### Unit Rating Chart (Combination unit)

Battery type	DC Voltage (Volts)	Model	Battery capacity in watts			
			1-1/2 hrs.	2 hrs.	3 hrs.	4 hrs.
Lead-calcium	6	UX4E	30	20	14	10
Nickel-Cadmium	6	UX4EN	24	18	12	9

### Lamp Head Source

- MR16 LED 6V 4W or 6V 5W

### Electronics

- Improved Diagnostics
- Optional Nexus® monitoring system
- 120/277 60Hz

### Special Wordings Panels

Available. Contact your sales representative with your design requirements


### Approvals

- UL 924 listed
- Meets NFPA101 (Life Safety Code), NFPA 70-NEC and OSHA illumination standards
- E-California Energy Commission Title 20 (Exit sign only)

### Warranty (subject to proper installation and maintenance)

Three-year limited warranty

Detailed warranty terms located on [page 197](#) or online at: [www.lightalarms.com](http://www.lightalarms.com)

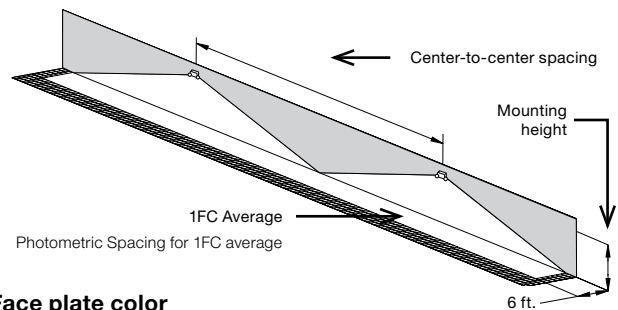


### Face plate color



Brushed aluminum




Black



White

**Dimensions** (Dimensions are approximate and subject to change):

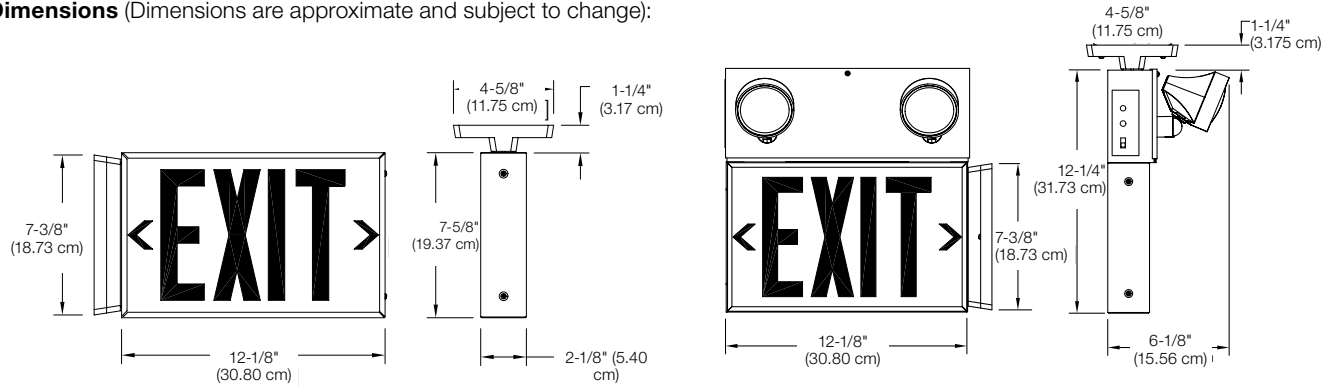

**Power consumption chart**

Model	AC Specs	DC Specs
AC-Only	120-277VAC, 50/60Hz (Less than 1.5W)	-
AC/DC	120-277VAC, 50/60Hz (Less than 1.5W)	6 to 24VDC (Less than 1.5W)
Self-powered	120-277VAC, 50/60Hz (Less than 3W)	Nd-Cd battery (Min. 90 minutes)
Combination	120-277VAC, 50/60Hz (Less than 5W)	See unit rating chart

**Accessories** (Order as a separate item)

Description	Product code
White pendant	PW-*
Black pendant	PB-*
Wire guard (exit-ceiling or end mount)	WG5-L
Wire guard (exit-wall mount)	WG12-L
Wire guard (combination unit-wall mount)	WG6-L

\*Specify pendant length (12", 24", 36" etc.)

**Ordering format – AC-only and Self-powered Models**

Series	Battery type	Back plate/ Frame color	Legend/ Face Plate Color	Legend source	Options
<b>UX4</b> = Universal (2) faceplates, (1) backplate and (1) canopy	<b>Blank</b> = AC-only <b>N</b> = Self-powered	<b>W</b> = White <b>B</b> = Black	<b>RW</b> = Red/White <b>RB</b> = Red/Black <b>RA</b> = Red/Aluminum <b>GW</b> = Green/White <b>GB</b> = Green/Black <b>GA</b> = Green/Aluminum	<b>LED</b> = LED	<b>Blank</b> = No options <b>-ID</b> = Improved Diagnostics <b>-NEX</b> = Nexus® wired <sup>1</sup> (consult your sales representative) <b>-NEXRF</b> = Nexus® wireless <sup>1</sup> (consult your sales representative) <b>-DC</b> = AC/DC 6V-24VDC <b>-VR</b> = Vandal resistant screws & lens

**Example: UX4WRWLED**

<sup>1</sup> Available in self-powered only

**Ordering format – UX4 LED Steel Exit & Combination units**

Series	Unit type	Back plate/ Frame color	Legend/ Face plate color	Legend source	Lamp head suffix	Lamp options	Options
<b>UX4</b> = Universal (2) faceplates, (1) backplate and (1) canopy	<b>E</b> = 6V-30W lead-calcium battery <b>EN</b> = 6V-24W Nickel-Cadmium battery	<b>W</b> = White <b>B</b> = Black	<b>RW</b> = Red/White <b>RB</b> = Red/Black <b>RA</b> = Red/Aluminum <b>GW</b> = Green/White <b>GB</b> = Green/Black <b>GA</b> = Green/Aluminum	<b>LED</b> = LED	<b>/0</b> = No heads <b>/1ELF3</b> = (1) ELF3 head <b>/2ELF3</b> = (2) ELF3 heads	<b>LD1</b> = 6V-4W MR16 LED <b>LD2</b> = 6V-5W MR16 LED	<b>Blank</b> = No options <b>-ID</b> = Improved Diagnostics (audible) <sup>1</sup> <b>-IDNA</b> = Improved Diagnostics (non-audible) <sup>1</sup> <b>-NEX</b> = Nexus® wired <sup>1</sup> - combo unit only (consult your sales representative) <b>-NEXRF</b> = Nexus® wireless <sup>1</sup> - combo unit only (consult your sales representative) <b>-T3</b> = Time Delay 15 minutes <b>-VR</b> = Vandal resistant screws

**Example: UX4EWRWLED/2ELFLD1**

<sup>1</sup> Not available with EN model