

Commercial Exit Signs

VC Series
Value+ "Economy Grade"
Thermoplastic Combo



Specifier's Reference

| |
|-----------|
| Project |
| Type |
| Model No. |
| Comments |

codes and standards

- UL listed to Standard 924
- NFPA 70 (National Electric Code)
- NFPA 101 (Life Safety Code)
- California Energy Commission
- UL listed for damp location.

construction

- White housing only.
- Low profile, snap-together quick mount design.
- Flame rated, UV stable thermoplastic housing.

installation

- Universal wall or ceiling mounting.
- Pop-out chevron directional indicators are easily removed when required.

electronics

- Maintenance free 6V sealed lead acid battery.
- Supplies 90 minutes of emergency power.
- Surge protection, low voltage disconnect, AC lockout installation, brown out protection, and constant current charger.
- 120/277 VAC selectable input.
- VC Units:
Input Power: 0.030A (120VAC)
Input Power: 0.013A (277VAC)

lamps

- Bright red or green energy efficient LED lamps
- Uniform 6" letter illumination (3/4" stroke).
- Lamp heads are adjustable and each contains a 6V-5.4W tungsten lamp.

battery

- Maintenance free sealed lead acid battery has an estimated service life of 5 years and a operating temperature range of 65°F (19°C) to 85°F (30°C).
- Provides 90 minutes of emergency illumination.

remote capacity

- Remote capacity model includes 6V maintenance free sealed lead acid batteries.
- Supplies 90 minutes of emergency power for exit sign plus an additional 12W of 6V-DC load.

warranty

- Three year warranty on unit.

Green Product Choice: VCRW

| Catalog Number | Volts | Wattage | Letter Color | Housing Color | Lamp Type | Remote Capacity |
|----------------|-------|---------|--------------|---------------|---------------|-----------------|
| VCRW | 6 | 22 | Red | White | 5.4V tungsten | 12W |
| VCGW | 6 | 22 | Green | White | 5.4W tungsten | 12W |

Combo Lamp Heads

Unique design allows for lamp heads to be adjusted to the side or top of the housing. This provides for maximum flexibility during installation.


Accessories

WG5 – Wire guard

Note:

All combos are universal (single face with an extra stencil face plate)
Refer to CA-51200 for matching remote lampheads.

dimensions

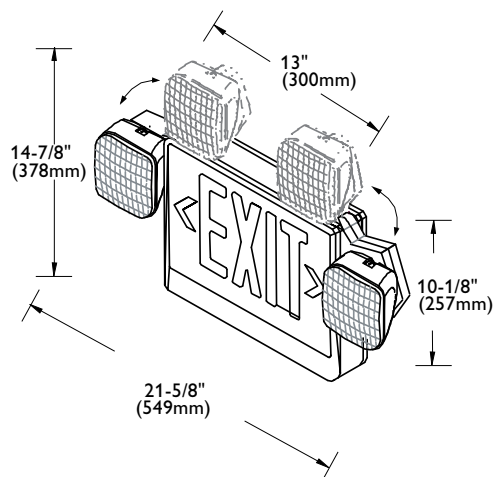

Some luminaires use fluorescent or high intensity discharge (HID) lamps that contain small amounts of mercury. Such lamps are labeled, "Contain Mercury" and/or the symbol "HG". Lamps that contain mercury must be disposed of in accordance with local requirements. Information regarding lamp recycling and disposal can be found at www.lamprecycle.org

© 2016 Philips Lighting Holding B.V. All rights reserved.
Philips reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.
philips.com/luminaires



Philips Lighting North America Corporation
200 Franklin Square Drive, Somerset, NJ 08873
Tel. 855-486-2216

Philips Lighting Canada Ltd.
281 Hillmount Rd, Markham, ON, Canada L6C 2S3
Tel. 800-668-9008