

VTF-LED

IP65 Rated LED Industrial Luminaire

DATE:

PROJECT:

COMMENTS:



FEATURES

- 4.0' fixture uses four high-efficiency LED boards
- Available in 3500K, 4000K, or 5000K
- High performance driver operates 100V-277V, 50-60HZ
- Standard surface mount configuration
- Standard 0-10V dimming
- Unit provides 1264 lumens when in battery backup mode



CONSTRUCTION

- Corrosion, flame and vandal resistant housing
- Integrated stainless steel mounting brackets
- Flat, steel reflector system finished in durable white powder coat
- UV stabilized, polycarbonate diffuser eliminates glare



APPROVALS

- IP66
- IP65
- NEMA 4X
- UL924
- NFPA 101 Life Safety Code
- NFPA 70 - NEC
- OSHA

WARRANTY

Isolite offers a 3-year limited warranty. For further details, refer to General Warranty and Obligations in the Isolite manual or on our website.

DIMENSIONS

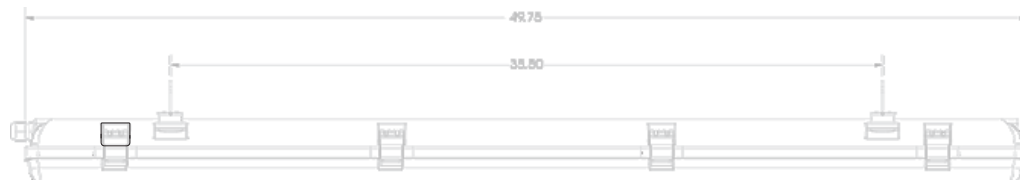

ORDERING INFORMATION *VTFLED-AC-MT-1L50*

1. SERIES

VTFLED

2. OPERATION

AC AC Only
EM Ni-Cad Battery Backup

3. MOUNTING

MT Top Mount
MCH 48" Chain Mount
MAC50 50" Adjustable Aviation Cable
MAC72 72" Adjustable Aviation Cable
MAC100 100" Adjustable Aviation Cable
MAC150 150" Adjustable Aviation Cable

4. OUTPUT

1L50(3500K) 50W LED 3500K
1L50(4000K) 50W LED 4000K
1L50(5000K) 50W LED 5000K
1L70(3500K) 70W LED 3500K
1L70(4000K) 70W LED 4000K
1L70(5000K) 70W LED 5000K

5. OPTIONS

BLANK = NO OPTION
TP Tamperproof Screws