

The WCHL-4X is Chicago Approved and Weatherproof. Commonly used for wash-down applications as well. Offering NEMA 4X protection as well as a durable Lexan lens. This fixture is exclusive to Big Beam. Available in AC only and Battery Backup. STAIRS/STAIR & Area Of Rescue Assistance glass is available.

FEATURES

- Units Satisfy the Requirements of NEMA 1, 2, 3, 3R, 4 & 4X enclosures
- 120/277 VAC Operation
- Maximum Input Rating (120 or 277VAC)
- Standard 1.7W LED strip
- Light-Emitting Diodes—25+ Year Life
- Indirect Placement for Diffused Legend Output
- Integrated Solid State System
- Constant Current, Controlled Automatic Charger Circuit
- Low—Voltage Battery Cutoff
- Brownout Sensitivity
- AC Power On LED Indicator Light
- Push to Test Button
- Sealed Nickel Cadmium Battery
- Open-Face Glass Panel
- Chicago Code Exit
- Back Mount standard. Custom mounting brackets available. Consult with factory
- Weatherproof, Wash-Down, NEMA 4X & suitable for all outdoor applications
- Heater recommended for Battery Backup versions to keep the battery protected and from reaching below 60F.

WARRANTY

5 Year Warranty



DIMENSIONS

Height: 15.5"

Width: 17.5"

Depth: 7"




WCHL-4X

The WCHL-4X is the NEMA 4X version of the WCHL. It offers the utmost protection in outdoor applications.



Options:

- ❖ **SS** – Internal Housing Stainless Steel
- ❖ **STAIRS**
- ❖ **STAIR**
- ❖ **AORA/HC** – Area Of Rescue Assistance with Handicap Symbol
- ❖ **HTRxxx** – Heater “xxx” specify 120V or 277V
- ❖ **EM** – End Mount Bracket
- ❖ **BLK** – Black 4X Housing

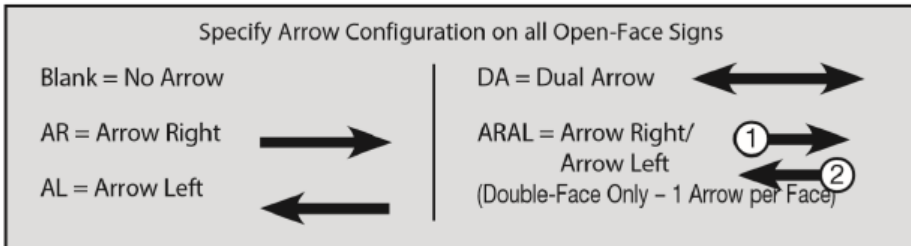

Series	Faces	Letter Color	Glass Finish	Internal Fixture Housing Finish	Options
WCHL-4X = AC ONLY	1 = SINGLE FACE	R = Red	W = White	W = White	-HTRxxx
EWCHL-4X = BATTERY BACKUP	2 = DOUBLE FACE			B = Black	

*Specify arrow configuration after this